


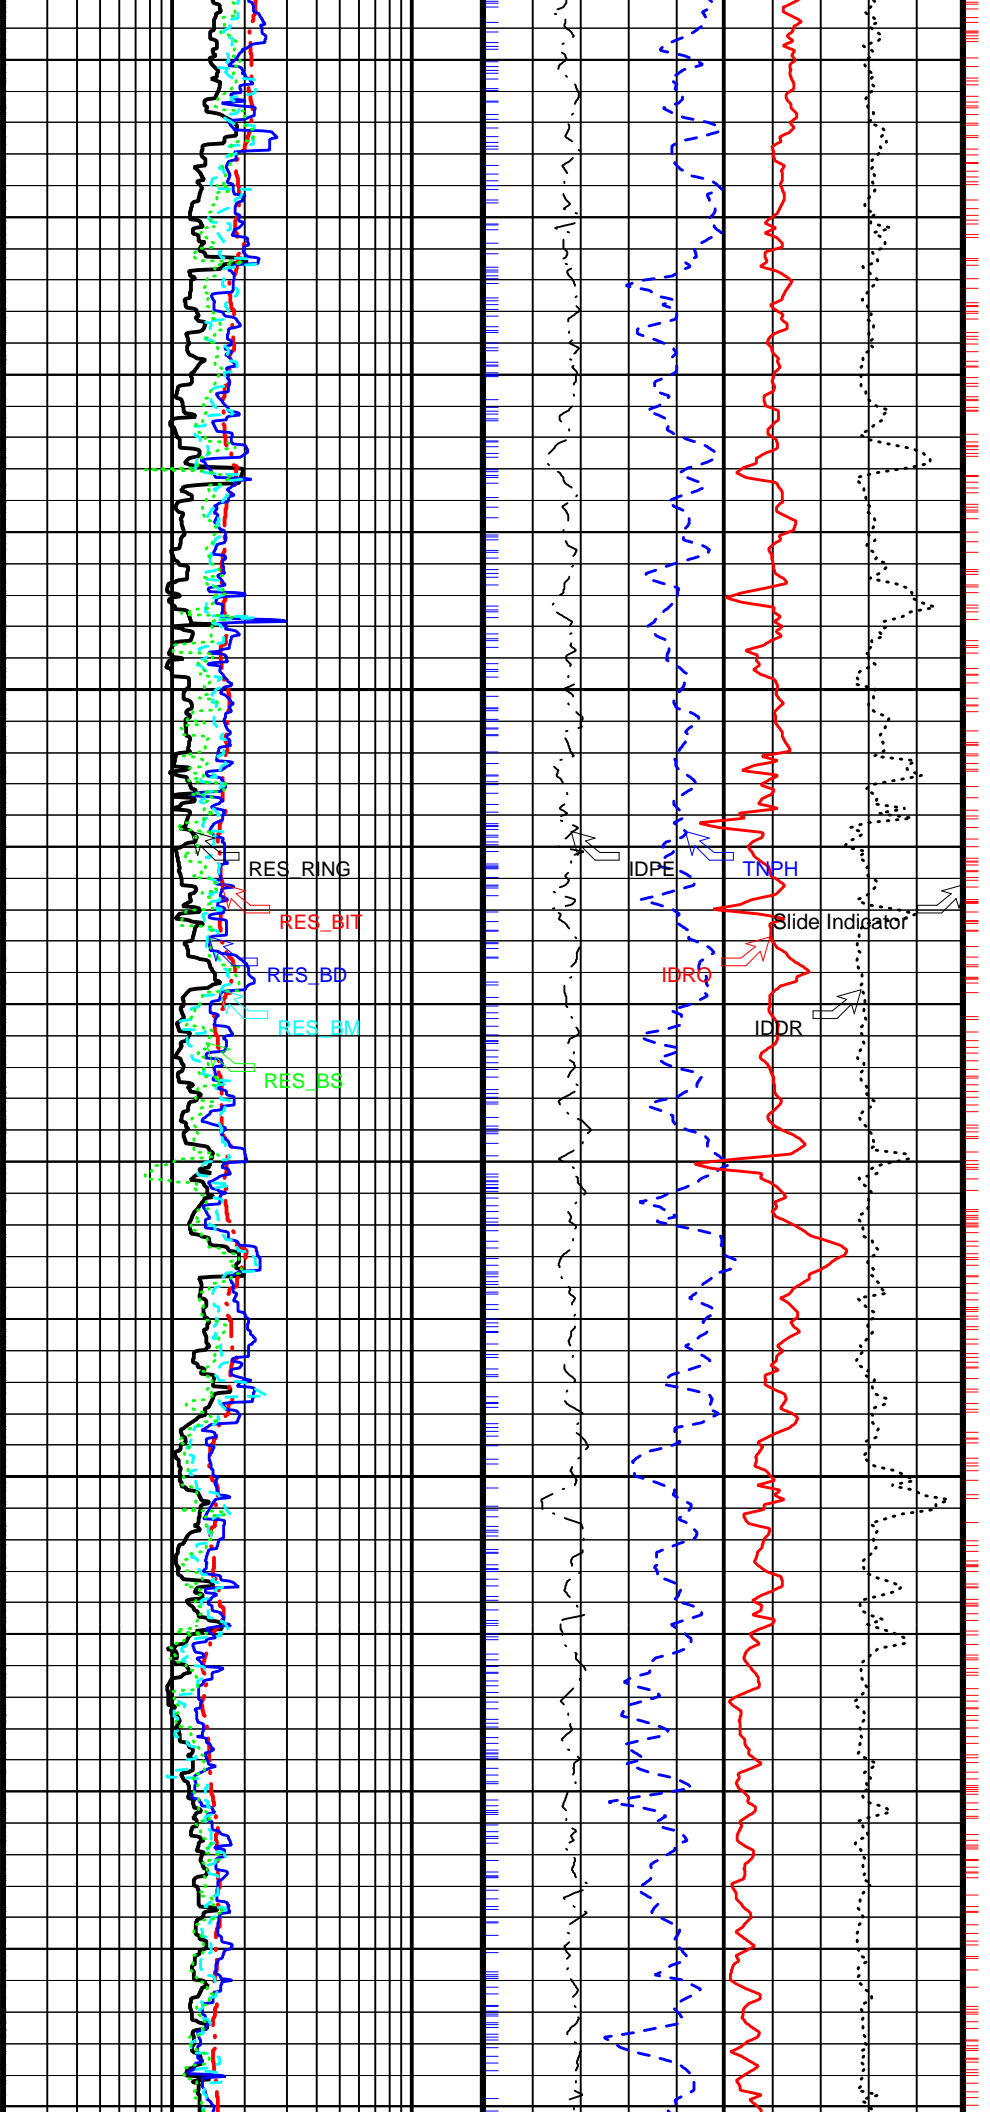
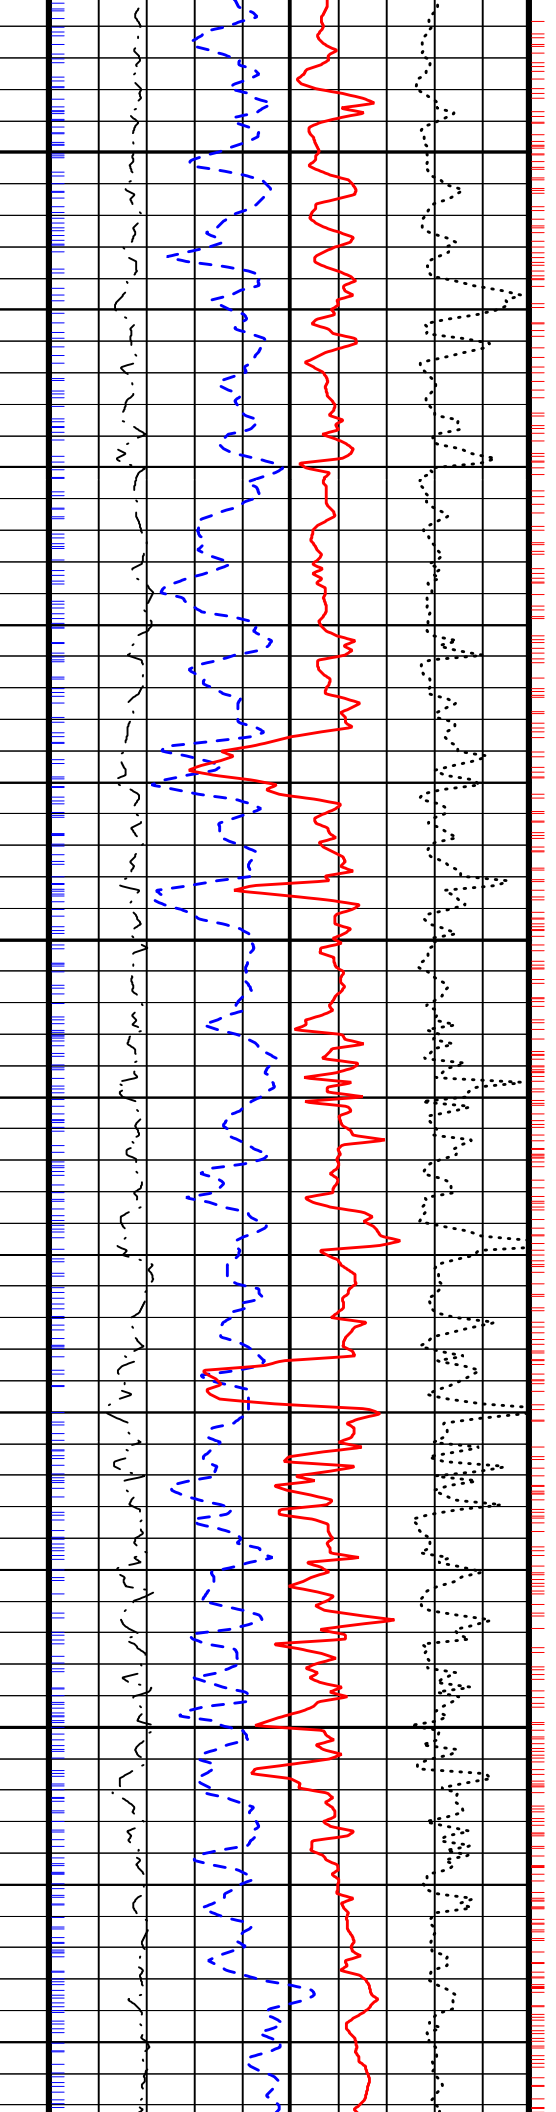
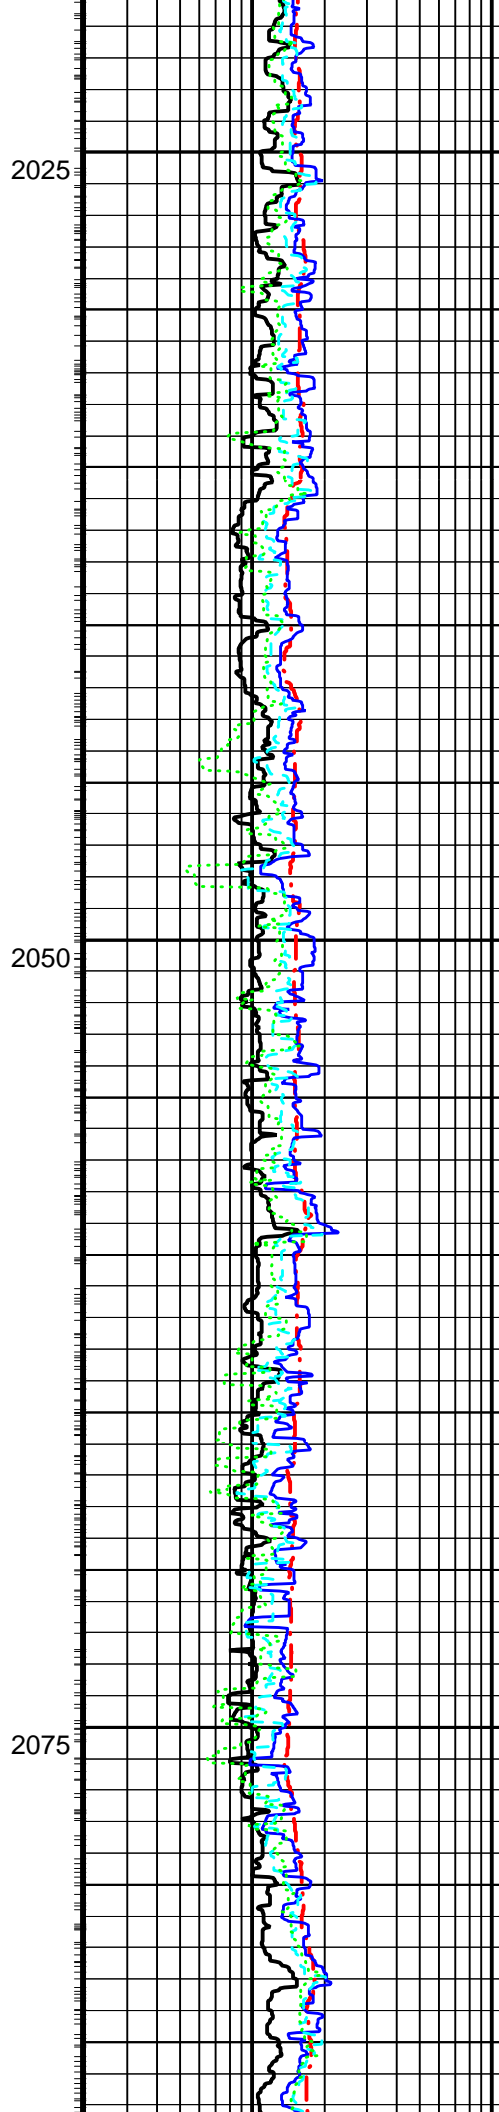
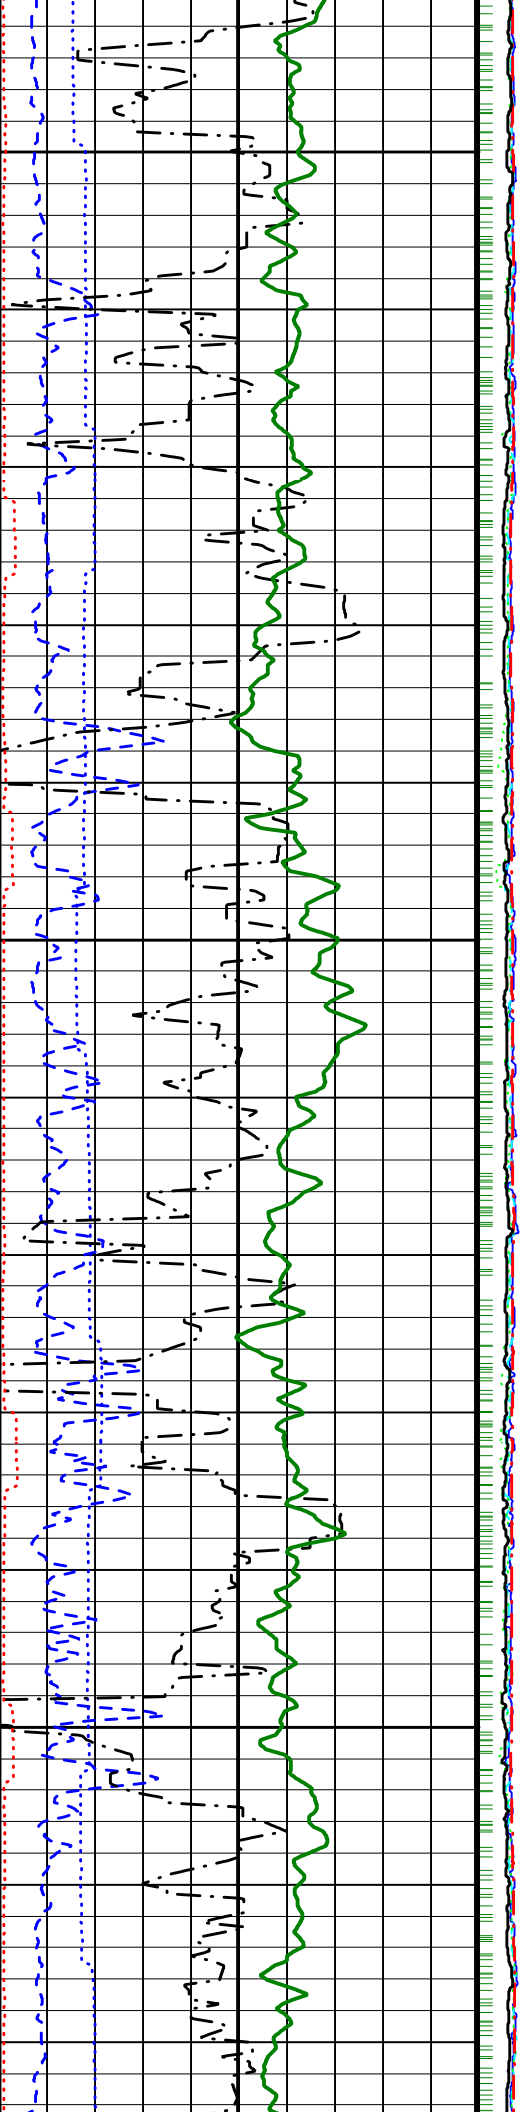


1975

2000

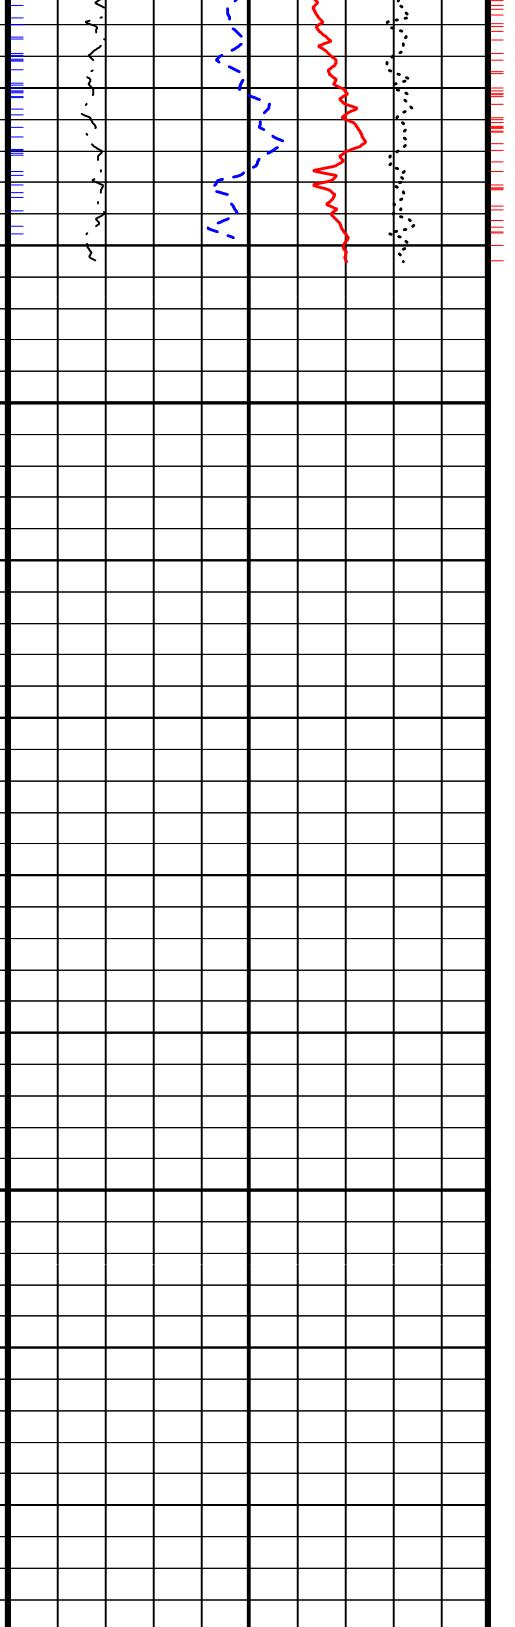

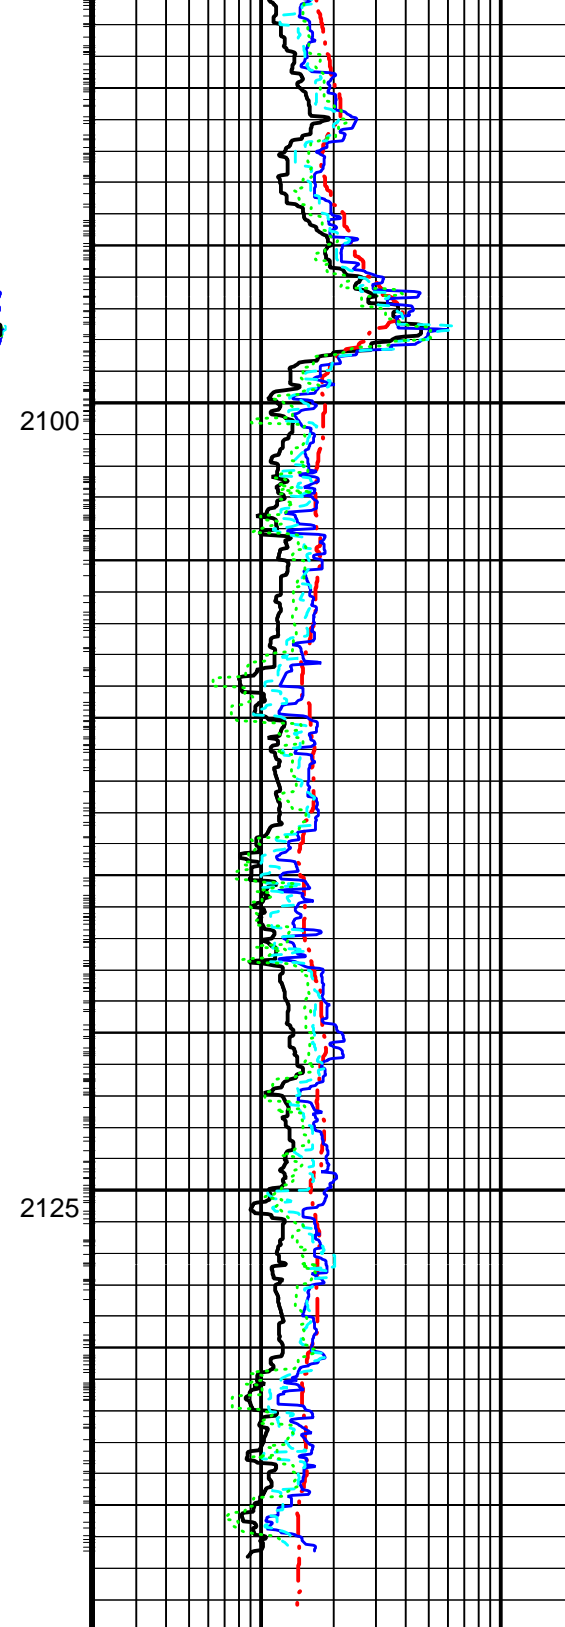

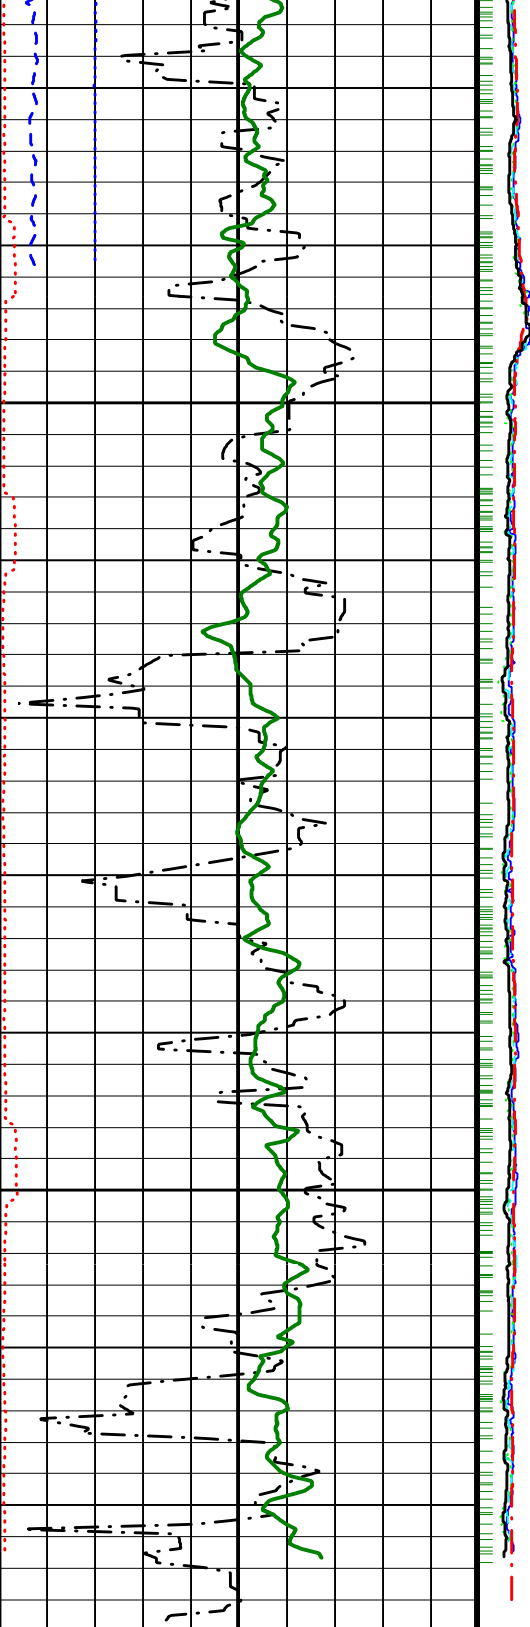

Density Time After Bit (TAB_DEN)
(HR) 0 10

RAB Gamma Ray (GR_RAB)
(GAPI) 0 150

Density Caliper,
Average (DCAV)
(IN) 9 14

Rate of Penetration, Averaged over Last
5ft (ROP5_RM)
(M/HR) 100 0

Ring Resistivity Time After Bit (TAB_

Ring Resistivity (RES_RING)
(OHMM) 0.2 20

Bit Resistivity (RES_BIT)
(OHMM) 0.2 20

Deep Button Resistivity (RES_BD)
(OHMM) 0.2 20

Medium Button Resistivity (RES_BM)
(OHMM) 0.2 20

Shallow Button Resistivity (RES_BS)

Thermal Neutron Porosity (TNPH)
(PU) 100 0

Image Derived Density (IDRO)
(G/C3) 1 2.65

Image Derived Density Correction
(IDDR)
(G/C3) -0.8 0.2

Image Derived
Photoelectric
Factor (IDPE)
(----) 0 10

RAB_RING (HR)	0.2 (OHMM)	20
------------------	---------------	----

PIP SUMMARY

Density Ticks, 0.1-ft

Neutron Ticks, 0.1 ft

+ Ring Samples

+ Gamma Ray Samples

IDEAL Version: ID10_2C_01.1SV
IDF

Company:	Lamont-Doherty Borehole Research	Schlumberger
Well:	CAS-03C	
Field:	Vancouver Island	
Rig:	JOIDES Resolution	Field Print
State:	Pacific Ocean	
GeoVISION Service 1:240 Measured Depth Recorded Mode, Composite Log		