

Company: Lamont Doherty

Well: Expedition 307 Site U1316C

Field: Porcupine Basin Carbonate Mounds

Rig: Joides Resolution Country: Ireland

Dipole Shear Sonic Imager

Gamma Ray

LOCATION			
Permanent Datum:	Mean Sea Level	Elev.:	K.B. 11.3 m
Log Measured From:	Drill Floor		G.L. -959 m
Drilling Measured From:	Drill Floor	Elev.:	D.F. 11 m

Rig: Joides Resolution	Field: Porcupine Basin Carbonate Mounds
Location: Expedition 307 Site U1306C	Well: Expedition 307 Site U1306C
Company: Lamont Doherty	
Ocean Atlantic	Max. Well Deviation
	Longitude 11° 43.79'W
	Latitude 51° 22.54'N

Logging Date	8-May-2005		Run 1	Run 2	Run
Run Number	Two				
Depth Driller	1102 m				
Schlumberger Depth	1102 m				
Bottom Log Interval	1102 m				
Top Log Interval	959 m				
Casing Driller Size @ Depth	0.000 in @ 1017 m				
Casing Schlumberger	1017 m				
Bit Size	9.875 in				
Type Fluid In Hole	Sepiolite				
Density	1.07 g/cm3				
Fluid Loss					
Source Of Sample					
RM @ Measured Temperature	0.322 ohm.m @ 22 degC				
RMF @ Measured Temperature	@ @				
RMC @ Measured Temperature	@ @				
Source RMF	RMC				
RM @ MRT	RMF @ MRT @ @				
Maximum Recorded Temperatures					
Circulation Stopped	8-May-2005 4:00				
Logger On Bottom	8-May-2005 10:00				
Unit Number	2082 Webster, TX				
Recorded By	Javier Espinosa				
Witnessed By	Philippe Galliot				

Logging Date	8-May-2005
Run Number	Two
Depth Driller	1102 m
Schlumberger Depth	1102 m
Bottom Log Interval	1102 m
Top Log Interval	959 m
Casing Driller Size @ Depth	0.000 in @ 1017 m
Casing Schlumberger	1017 m
Bit Size	9.875 in
Type Fluid In Hole	Sepiolite
Density	1.07 g/cm3
Fluid Loss	
Source Of Sample	
RM @ Measured Temperature	0.322 ohm.m @ 22 degC
RMF @ Measured Temperature	@ @
RMC @ Measured Temperature	@ @
Source RMF	RMC
RM @ MRT	RMF @ MRT @ @
Maximum Recorded Temperatures	
Circulation Stopped	8-May-2005 4:00
Logger On Bottom	8-May-2005 10:00
Unit Number	2082 Webster, TX
Recorded By	Javier Espinosa
Witnessed By	Philippe Galliot

Logging Date	8-May-2005		Run 1	Run 2	Run
Run Number	Two				
Depth Driller	1102 m				
Schlumberger Depth	1102 m				
Bottom Log Interval	1102 m				
Top Log Interval	959 m				
Casing Driller Size @ Depth	0.000 in @ 1017 m				
Casing Schlumberger	1017 m				
Bit Size	9.875 in				
Type Fluid In Hole	Sepiolite				
Density	1.07 g/cm3				
Fluid Loss					
Source Of Sample					
RM @ Measured Temperature	0.322 ohm.m @ 22 degC				
RMF @ Measured Temperature	@ @				
RMC @ Measured Temperature	@ @				
Source RMF	RMC				
RM @ MRT	RMF @ MRT @ @				
Maximum Recorded Temperatures					
Circulation Stopped	8-May-2005 4:00				
Logger On Bottom	8-May-2005 10:00				
Unit Number	2082 Webster, TX				
Recorded By	Javier Espinosa				
Witnessed By	Philippe Galliot				

Logging Date	8-May-2005
Run Number	Two
Depth Driller	1102 m
Schlumberger Depth	1102 m
Bottom Log Interval	1102 m
Top Log Interval	959 m
Casing Driller Size @ Depth	0.000 in @ 1017 m
Casing Schlumberger	1017 m
Bit Size	9.875 in
Type Fluid In Hole	Sepiolite
Density	1.07 g/cm3
Fluid Loss	
Source Of Sample	
RM @ Measured Temperature	0.322 ohm.m @ 22 degC
RMF @ Measured Temperature	@ @
RMC @ Measured Temperature	@ @
Source RMF	RMC
RM @ MRT	RMF @ MRT @ @
Maximum Recorded Temperatures	
Circulation Stopped	8-May-2005 4:00
Logger On Bottom	8-May-2005 10:00
Unit Number	2082 Webster, TX
Recorded By	Javier Espinosa
Witnessed By	Philippe Galliot

Logging Date	8-May-2005		Run 1	Run 2	Run
Run Number	Two				
Depth Driller	1102 m				
Schlumberger Depth	1102 m				
Bottom Log Interval	1102 m				
Top Log Interval	959 m				
Casing Driller Size @ Depth	0.000 in @ 1017 m				
Casing Schlumberger	1017 m				
Bit Size	9.875 in				
Type Fluid In Hole	Sepiolite				
Density	1.07 g/cm3				
Fluid Loss					
Source Of Sample					
RM @ Measured Temperature	0.322 ohm.m @ 22 degC				
RMF @ Measured Temperature	@ @				
RMC @ Measured Temperature	@ @				
Source RMF	RMC				
RM @ MRT	RMF @ MRT @ @				
Maximum Recorded Temperatures					
Circulation Stopped	8-May-2005 4:00				
Logger On Bottom	8-May-2005 10:00				
Unit Number	2082 Webster, TX				
Recorded By	Javier Espinosa				
Witnessed By	Philippe Galliot				

DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.





OTHER SERVICES1 OS1: TCOM OS2: FMS OS3: OS4: OS5:	OTHER SERVICES2 OS1: OS2: OS3: OS4: OS5:
--	---


REMARKS: RUN NUMBER 1 Parameters and presentations as per IODP standards Tool ran as per tool sketch below Hole drilled with RCB Hole flushed with Sepiolite Drill pipe riser to 1000m for second pass	REMARKS: RUN NUMBER 2
---	-----------------------

RUN 1			RUN 2		
SERVICE ORDER #: PROGRAM VERSION: 12C0-301 FLUID LEVEL:			SERVICE ORDER #: PROGRAM VERSION: FLUID LEVEL:		
LOGGED INTERVAL	START	STOP	LOGGED INTERVAL	START	STOP

EQUIPMENT DESCRIPTION

RUN 1		RUN 2	
SURFACE EQUIPMENT			
GSR-U/Y WITM (DTS)-A			

DOWNHOLE EQUIPMENT			
LEH-QT			32.33
LEH-QT			
DTC-H	CTEM		31.16
ECH-KC	TelStatus		31.44
	ToolStatu		30.52
SGT-N	Gamma Ray		30.25
SGH-K			30.52

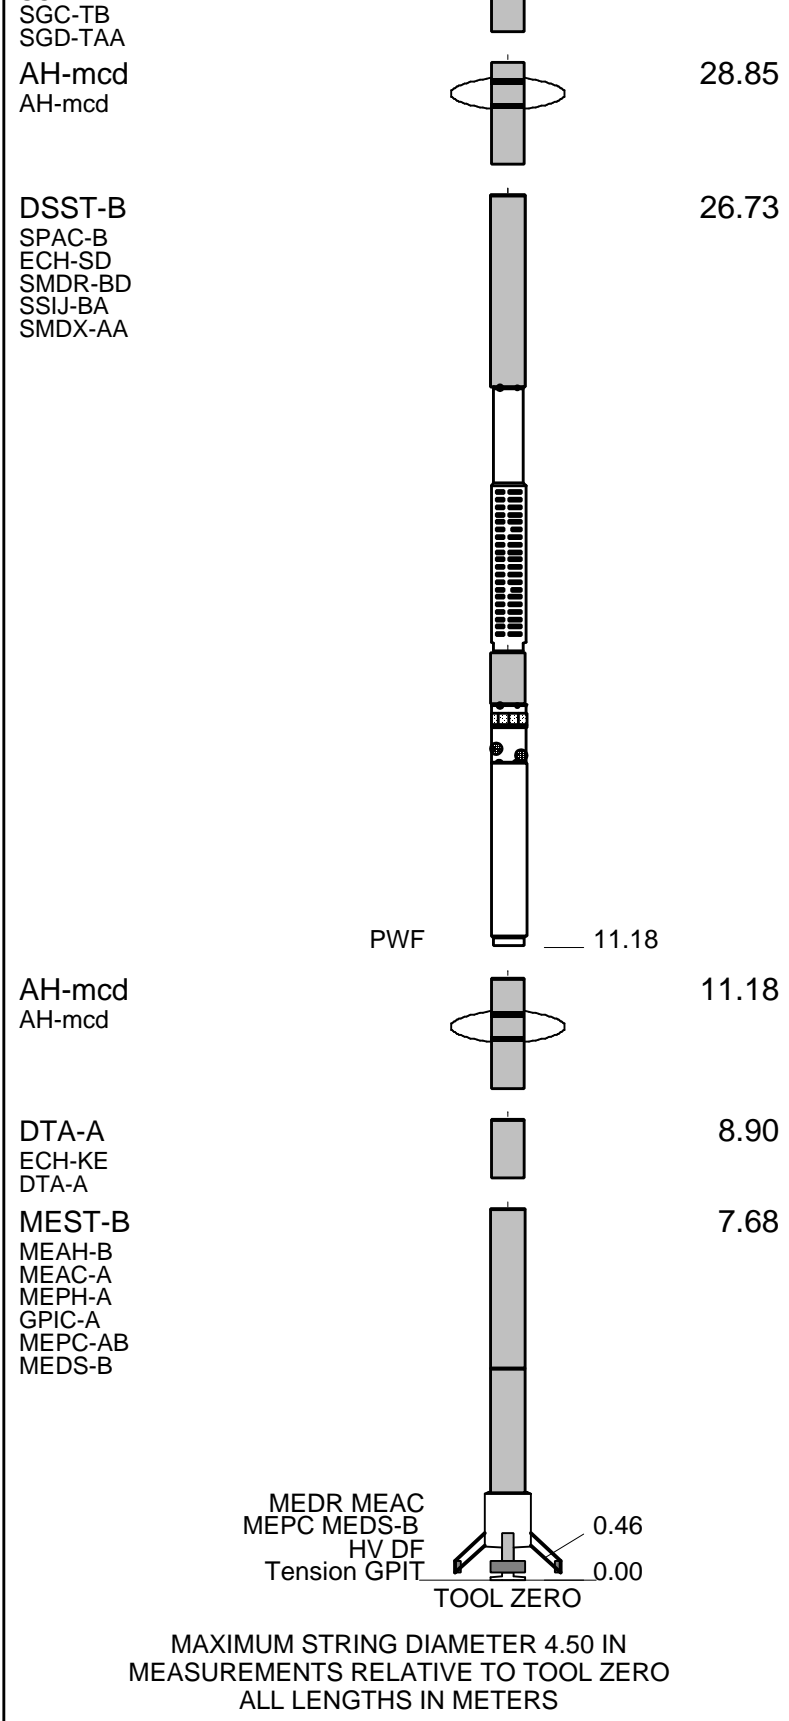


Production String	(in)	(m)	Well Schematic	(m)	(in)	Casing String
	OD	ID		MD	MD	

Kelly Bushing Elevation
Derrick Floor Elevation

Mean Sea Level

11.3
11.0

0.0

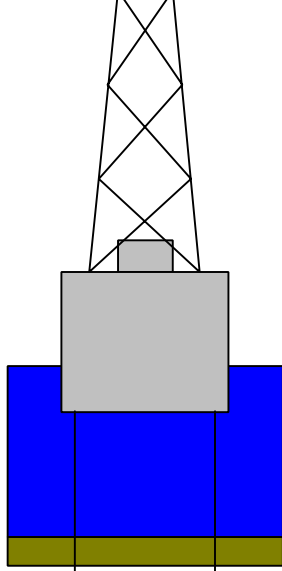

11.0 5.000

Casing String



959.0 9.875
1017.0 5.000

Borehole Segment

Casing Shoe

Schlumberger

FIRST PASS

MAXIS Field Log

Output DLIS Files

DEFAULT	FMS_DSI_007LUP	FN:8	PRODUCER	08-May-2005 10:20	1104.0 M	974.9 M
REDUCED	FMS_DSI_007LUP	FN:9	PRODUCER	08-May-2005 10:20	1104.0 M	974.9 M

OP System Version: 12C0-301

MCM







MEST-B	12C0-301	DTA-A	12C0-301
DSST-B	12C0-301	SGT-N	12C0-301
DTC-H	12C0-301		


PIP SUMMARY

Time Mark Every 60 S

Waveform Data Copy Indicator 4 -
Monopole P&S (WCI4)



0 (---) 10

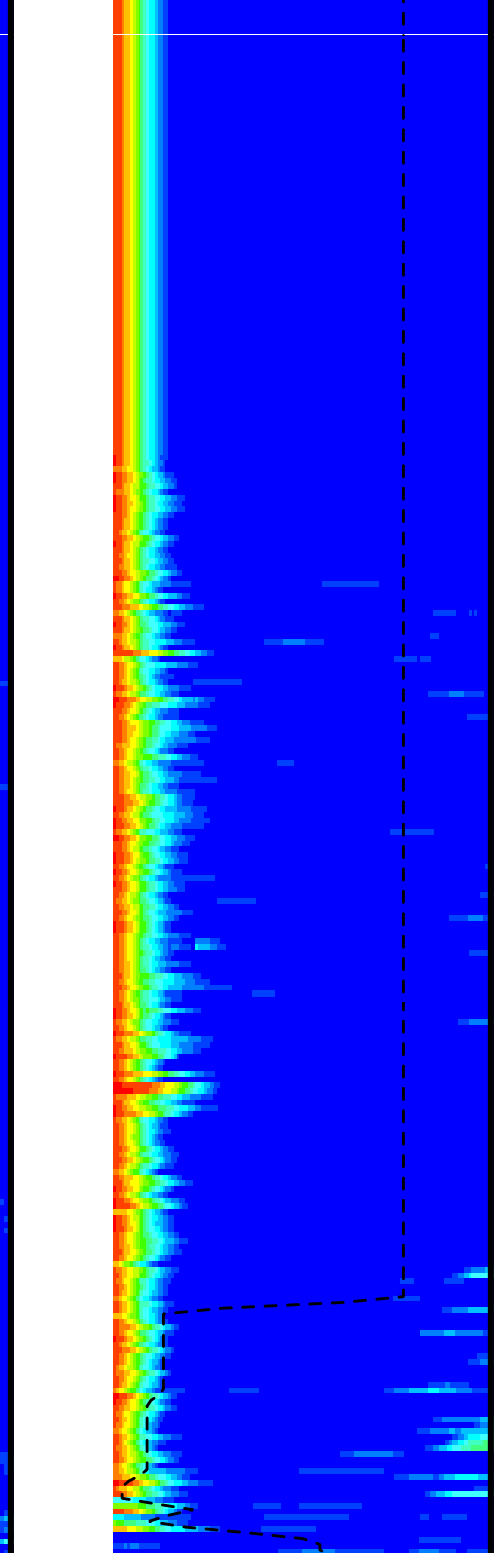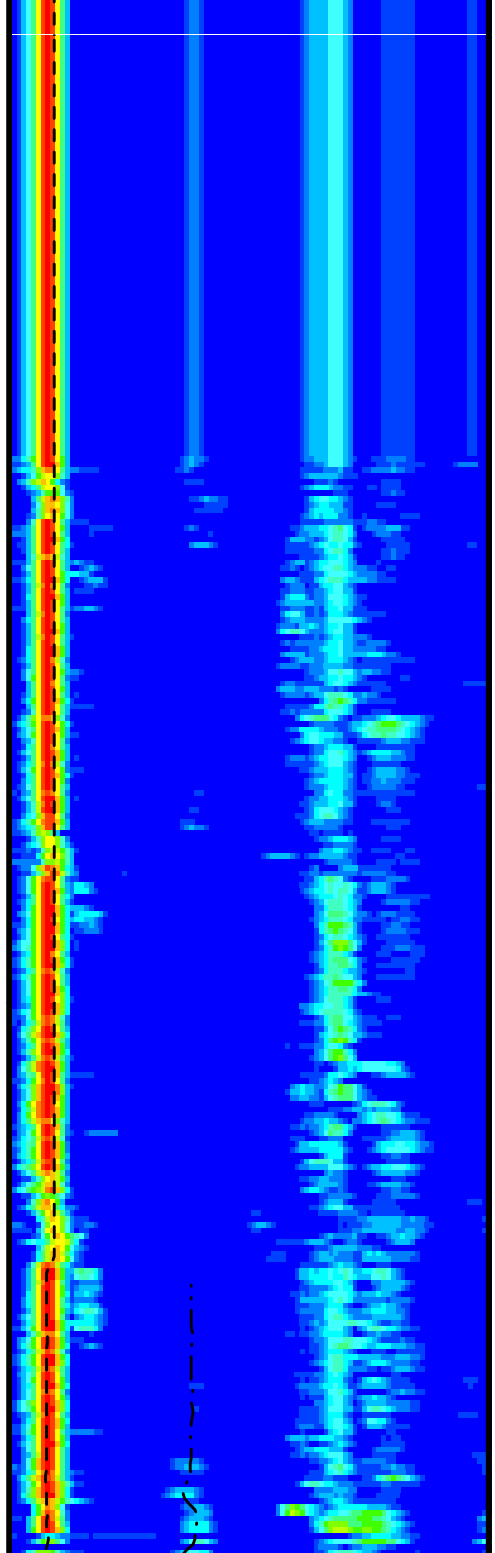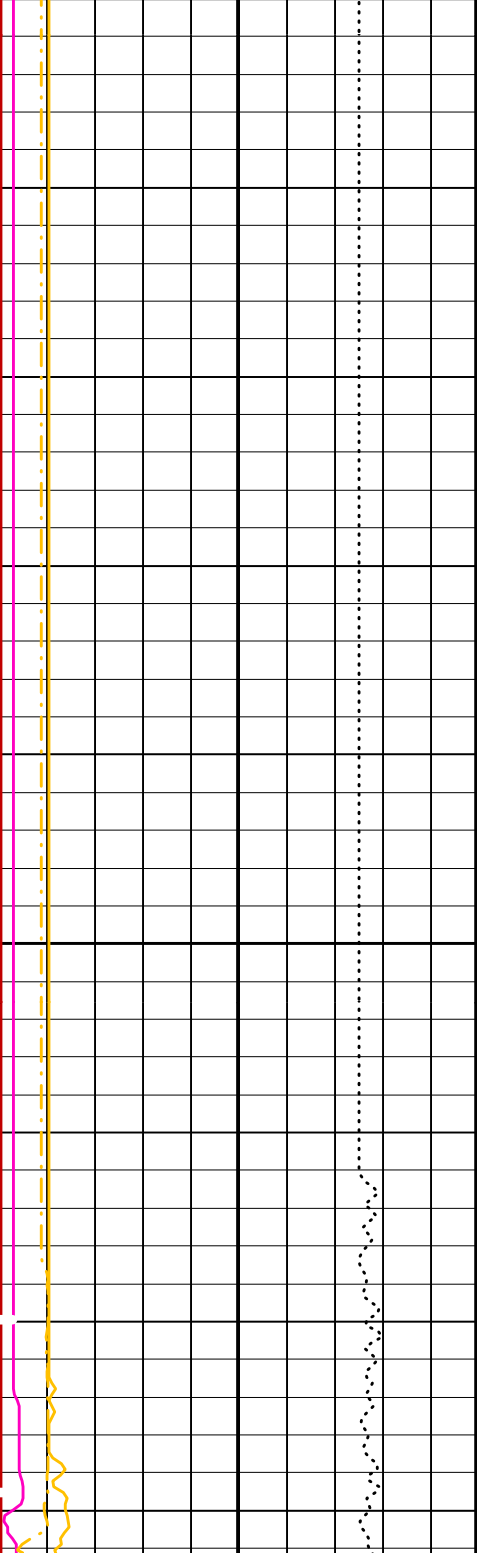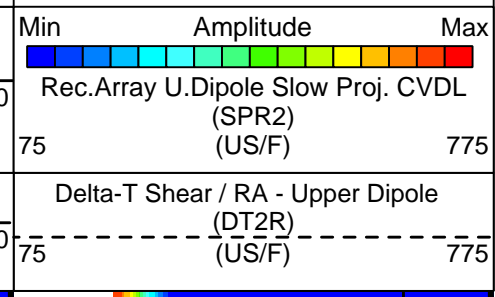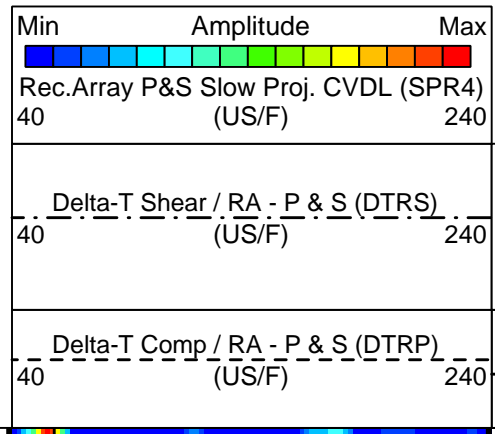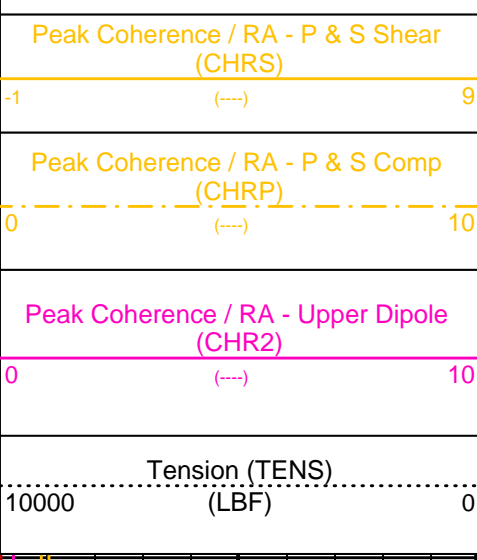


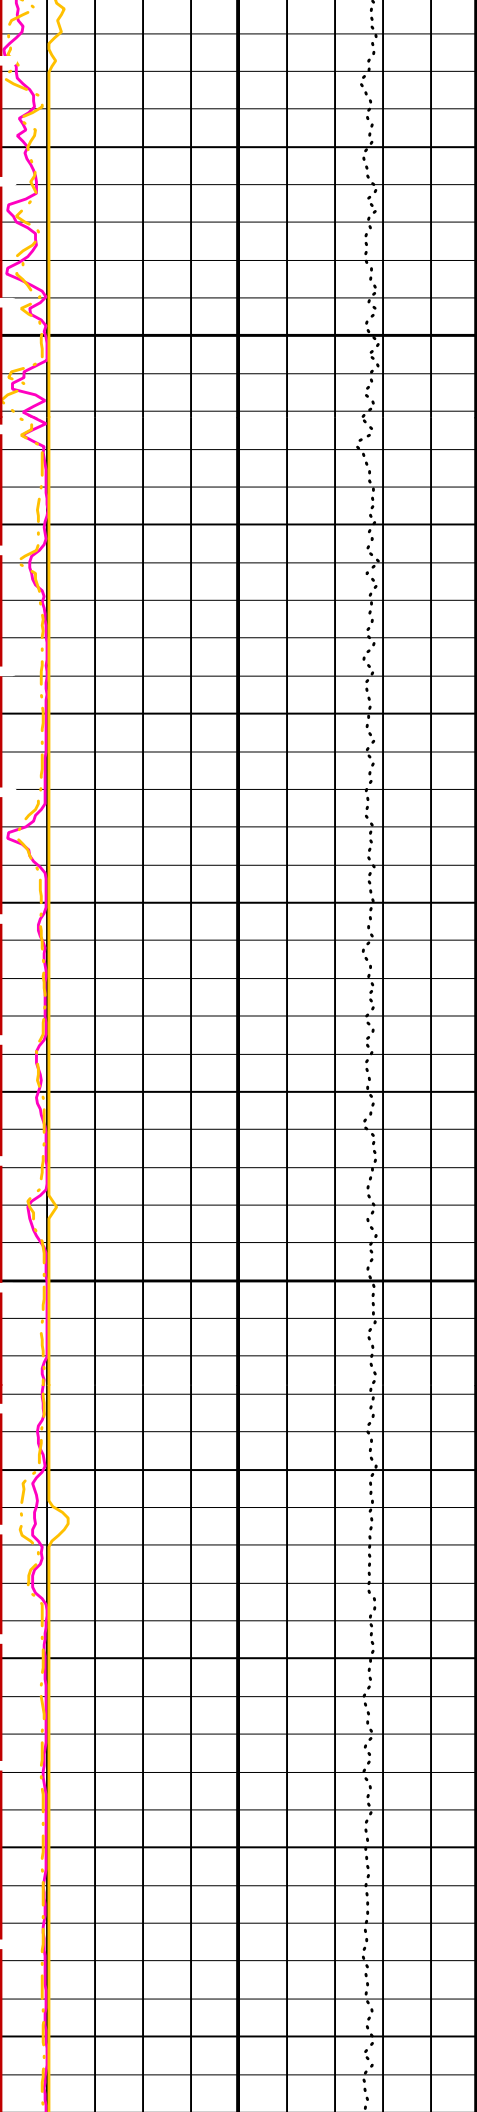

1025



1050

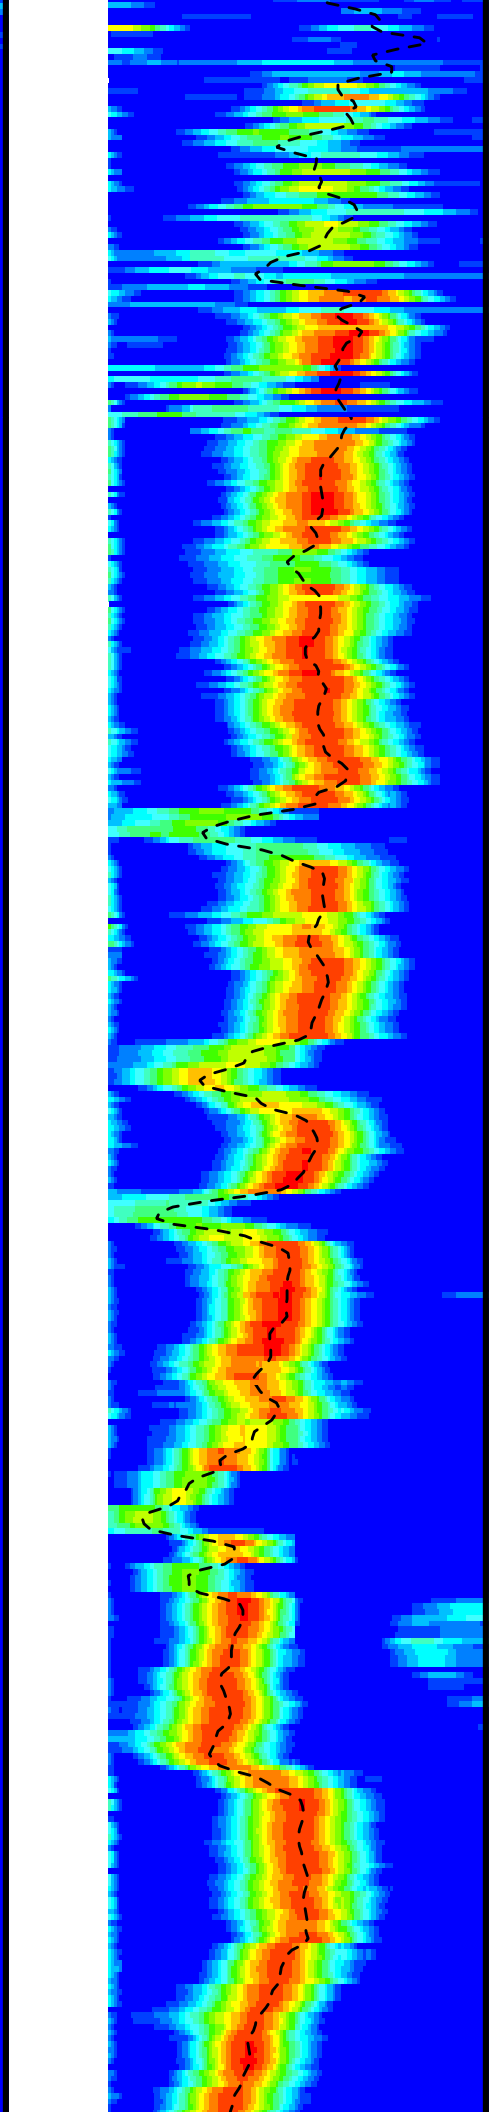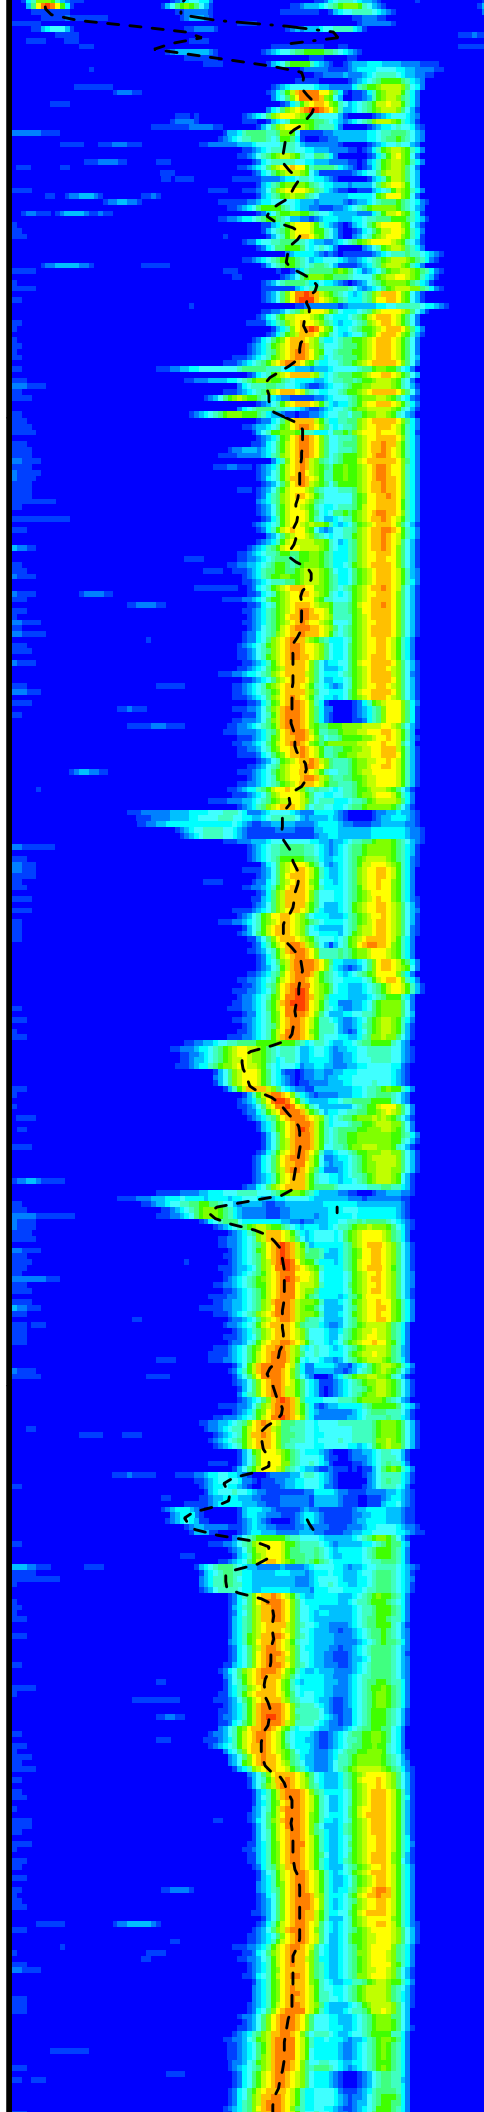

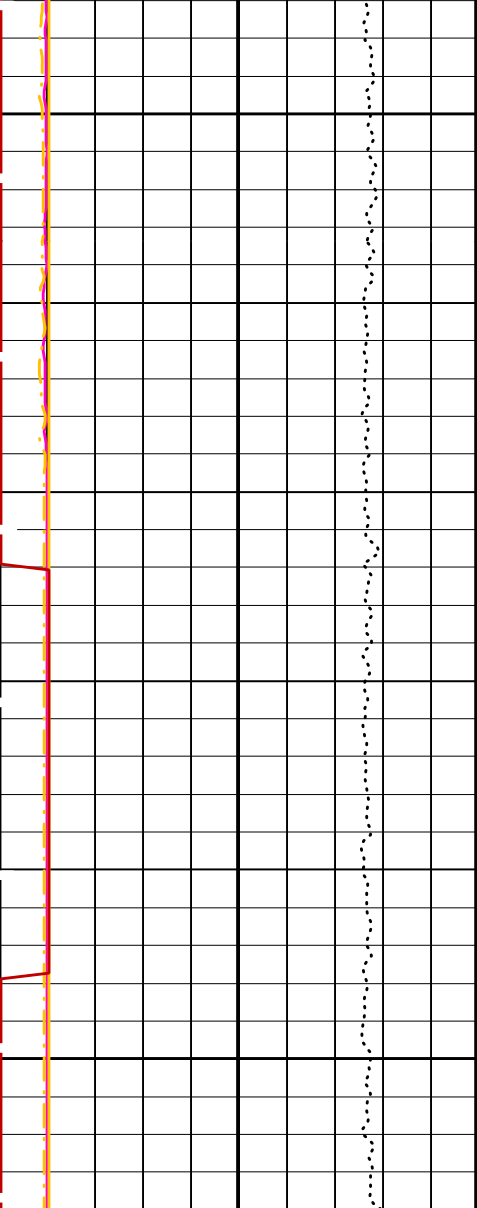

1075

1100

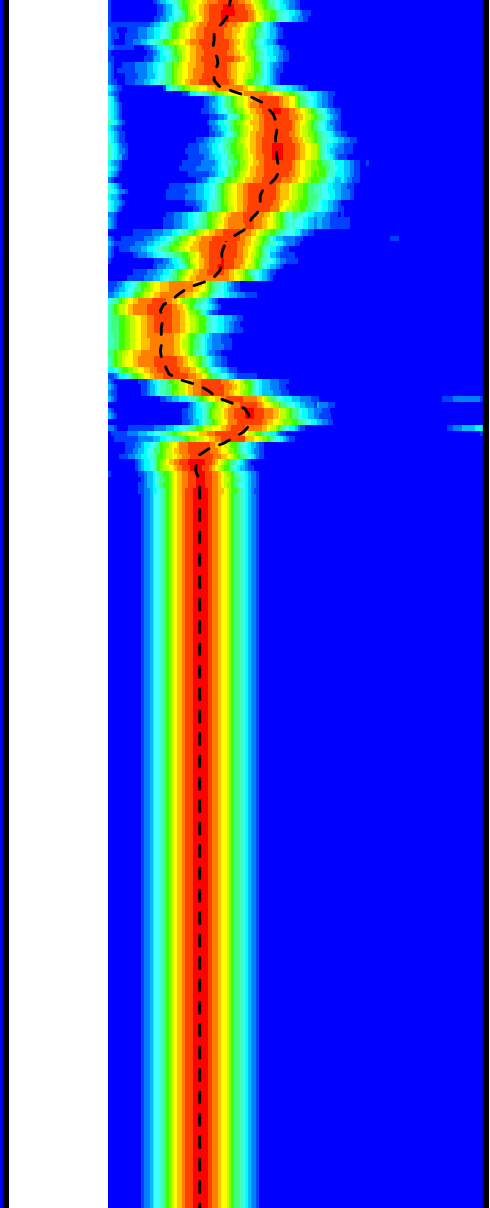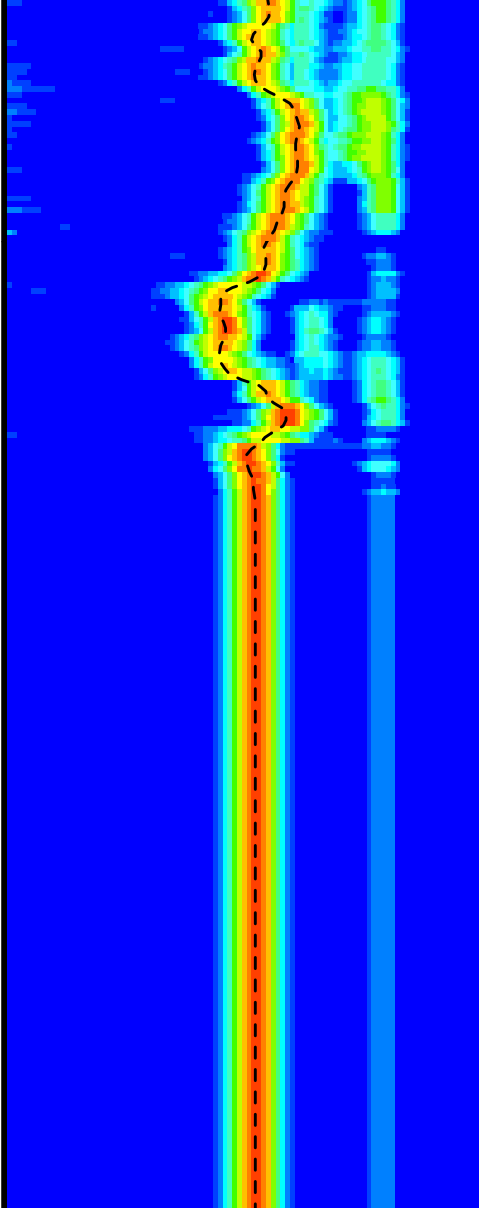

Tension (TENS) (LBF)	10000	0
Peak Coherence / RA - Upper Dipole (CHR2)	0	10
Peak Coherence / RA - P & S Comp (CHRP)	0	10
Peak Coherence / RA - P & S Shear (CHRS)	-1	9
Waveform Data Copy Indicator 4 - Monopole P&S (WCI4)	0	10

Delta-T Comp / RA - P & S (DTRP) (US/F)	40	240
Delta-T Shear / RA - P & S (DTRS) (US/F)	40	240
Min	Amplitude	Max
Rec.Array P&S Slow Proj. CVDL (SPR4)		
40	(US/F)	240

Delta-T Shear / RA - Upper Dipole (DT2R) (US/F)	75	775
Min	Amplitude	Max
Rec.Array U.Dipole Slow Proj. CVDL (SPR2) (US/F)		
75	(US/F)	775

PIP SUMMARY

Time Mark Every 60 S

Parameters

DLIS Name	Description	Value
DSST-B:	Dipole Shear Imager - B	

BHS	Borehole Status	OPEN	
CASF	Label Casing Function - Monopole P&S	50	
COLL	Label Slowness Lower Limit - Monopole P&S Compressional	40	US/F
COUL	Label Slowness Upper Limit - Monopole P&S Compressional	180	US/F
DDE2	Digitizing Delay 2	0	US
DDE4	Digitizing Delay 4	0	US
DDEX	Digitizing Delay X	0	US
DLCS	Label Compressional Source - Dipole Shear	USE	
DSHL	Label Slowness Lower Limit - Dipole Shear	220	US/F
DSHU	Label Slowness Upper Limit - Dipole Shear	1600	US/F
DSI2	Digitizer Sample Interval 2	40	US
DSI4	Digitizer Sample Interval 4	10	US
DSIX	Digitizer Sample Interval X	40	US
DTCS	Compressional Delta-T Source for DTCS Channel	PS_COMP	
DTF	Delta-T Fluid	189	US/F
DWC2	Digitizer Word Count 2	512	
DWC4	Digitizer Word Count 4	512	
DWCX	Digitizer Word Count X	512	
FILG	Label Fill Gap Control - Monopole P&S	COMP_SHEAR	
LFC	Label Formation Character - Monopole P&S	DYNAMIC	
MCS	Mean Casing Slowness	57	US/F
MTXG	Monopole Transmitter Geometry	186	IN
NWI2	Number Waveform Items 2	8	
NWI4	Number Waveform Items 4	8	
NWIX	Number Waveform Items X	0	
RSMN	Label Shear/Compressional Minimum Ratio - Monopole P&S	1.4	
RSMX	Label Shear/Compressional Maximum Ratio - Monopole P&S	2.12	
RX1G	Receiver 1 Geometry	294	IN
RX2G	Receiver 2 Geometry	300	IN
RX3G	Receiver 3 Geometry	306	IN
RX4G	Receiver 4 Geometry	312	IN
RX5G	Receiver 5 Geometry	318	IN
RX6G	Receiver 6 Geometry	324	IN
RX7G	Receiver 7 Geometry	330	IN
RX8G	Receiver 8 Geometry	336	IN
SAM2	DSST Sonic Acquisition Mode 2 - Upper Dipole Mode	ODD	
SAM4	DSST Sonic Acquisition Mode 4 - High Frequency Monopole Mode for P&S	EVEN	
SAMX	DSST Sonic Acquisition Mode X - Both Dipoles or Monopole Mode for Expert	OFF	
SAS2	STC Sonic Array Status - Upper Dipole	255	
SAS4	STC Sonic Array Status - Monopole P&S	255	
SBO2	STC Search Band Offset - Upper Dipole	3000	US
SBO4	STC Search Band Offset - Monopole P&S	500	US
SBR4	STC Baseline Removal - Monopole P&S	ON	
SBW2	STC Search Bandwidth - Upper Dipole	8000	US
SBW4	STC Search Bandwidth - Monopole P&S	2000	US
SFC2	STC Formation Character - Upper Dipole	SELECTABLE	
SFC4	STC Formation Character - Monopole P&S	SELECTABLE	
SFM2	STC Filter - Upper Dipole	B1-3K	
SFM4	STC Filter - Monopole P&S	B3-20K	
SHLL	Label Slowness Lower Limit - Monopole P&S Shear	75	US/F
SHUL	Label Slowness Upper Limit - Monopole P&S Shear	180	US/F
SLL2	STC Slowness Lower Limit - Upper Dipole	220	US/F
SLL4	STC Slowness Lower Limit - Monopole P&S	40	US/F
SST2	STC Slowness Step - Upper Dipole	4	US/F
SST4	STC Slowness Step - Monopole P&S	2	US/F
SSW2	STC Source Waveform - Upper Dipole	WF_SAM2	
SSW4	STC Source Waveform - Monopole P&S	WF_SAM4	
STLL	Label Slowness Lower Limit - Monopole Stoneley	180	US/F
STUL	Label Slowness Upper Limit - Monopole Stoneley	780	US/F
SUL2	STC Slowness Upper Limit - Upper Dipole	1600	US/F
SUL4	STC Slowness Upper Limit - Monopole P&S	240	US/F
SWD2	STC Slowness Width - Upper Dipole	40	US/F
SWD4	STC Slowness Width - Monopole P&S	10	US/F
TBF2	STC Time for Baseline Fill - Upper Dipole	0	US
TBF4	STC Time for Baseline Fill - Monopole P&S	300	US
TLL2	STC Time Lower Limit - Upper Dipole	1420	US
TLL4	STC Time Lower Limit - Monopole P&S	150	US
TST2	STC Time Step - Upper Dipole	200	US
TST4	STC Time Step - Monopole P&S	50	US
TUL2	STC Time Upper Limit - Upper Dipole	20440	US
TUL4	STC Time Upper Limit - Monopole P&S	3660	US
TWD2	STC Time Width - Upper Dipole	2000	US
TWD4	STC Time Width - Monopole P&S	1000	US
TWI2	STC Integration Time Window - Upper Dipole	1600	US
TWI4	STC Integration Time Window - Monopole P&S	500	US
TWSX	Transmitter Waveform Select X	0	
UTXG	Upper Dipole Transmitter Geometry	162	IN
WFM4	Waveform Mode 4	W1	
BHS	SGT-N: Scintillation Gamma-Ray - N Borehole Status	OPEN	

OP System Version: 12C0-301

MCM

MEST-B	12C0-301	DTA-A	12C0-301
DSST-B	12C0-301	SGT-N	12C0-301
DTC-H	12C0-301		

Output DLIS Files

DEFAULT	FMS_DSI_007LUP	FN:8	PRODUCER	08-May-2005 10:20
REDUCED	FMS_DSI_007LUP	FN:9	PRODUCER	08-May-2005 10:20



SECOND PASS

MAXIS Field Log

Output DLIS Files

DEFAULT	FMS_DSI_008LUP	FN:10	PRODUCER	08-May-2005 10:57	1104.0 M	915.2 M
REDUCED	FMS_DSI_008LUP	FN:11	PRODUCER	08-May-2005 10:57	1104.0 M	915.2 M

OP System Version: 12C0-301








MCM


MEST-B	12C0-301	DTA-A	12C0-301
DSST-B	12C0-301	SGT-N	12C0-301
DTC-H	12C0-301		

PIP SUMMARY

▶ Time Mark Every 60 S

Waveform Data Copy Indicator 4 - Monopole P&S (WCI4)	0 (---) 10
Peak Coherence / RA - P & S Shear (CHRS)	-1 (---) 9
Peak Coherence / RA - P & S Comp (CHRP)	0 (---) 10
Peak Coherence / RA - Upper Dipole (CHR2)	0 (---) 10
Tension (TENS) (LBF)	10000 (---) 0

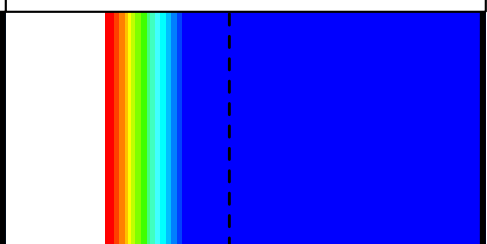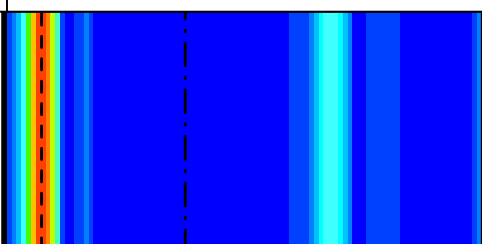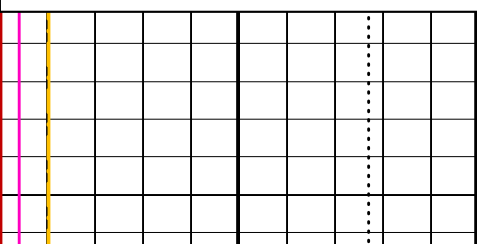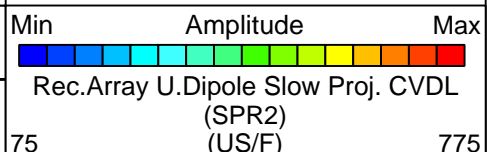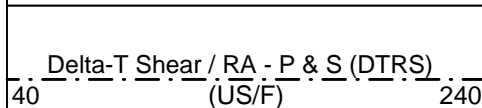
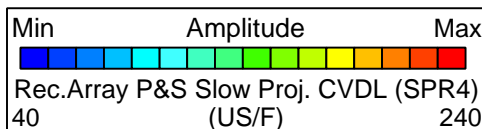


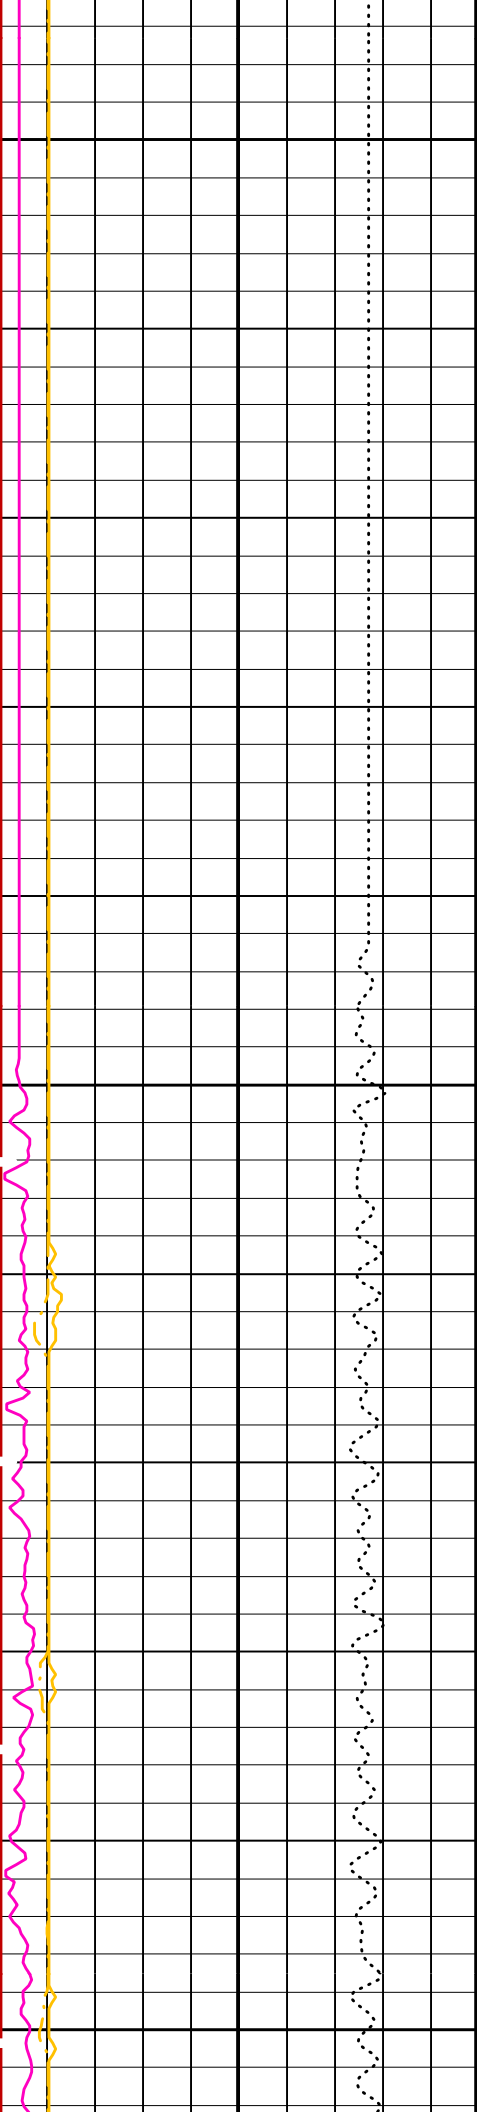


925

950


975

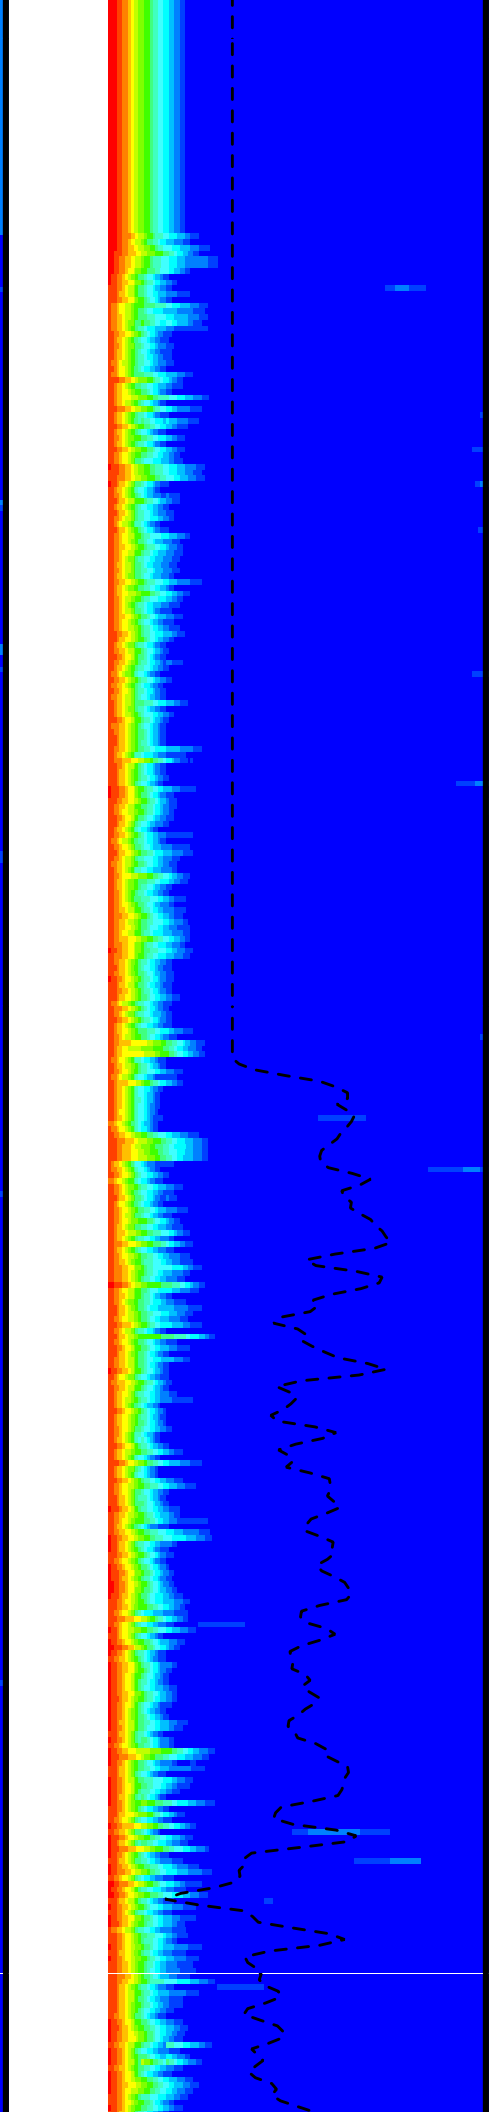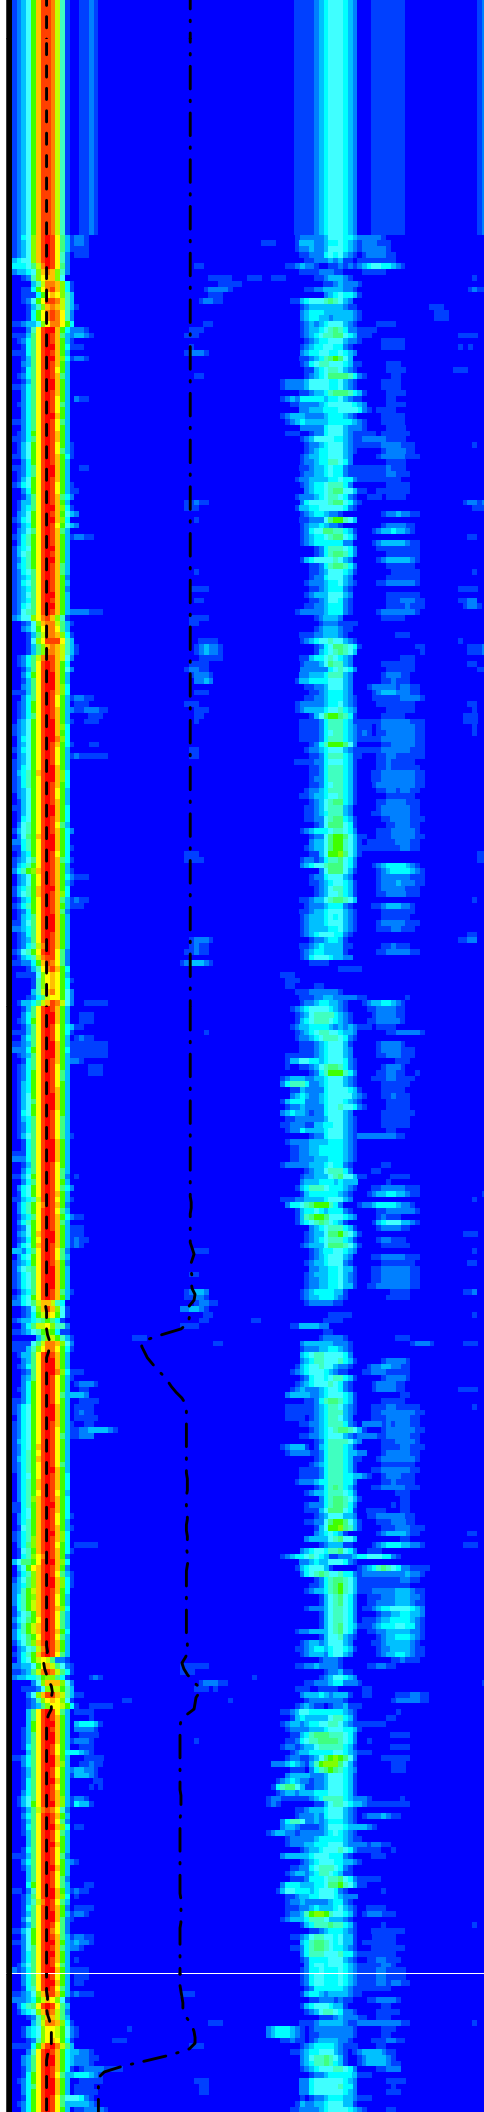


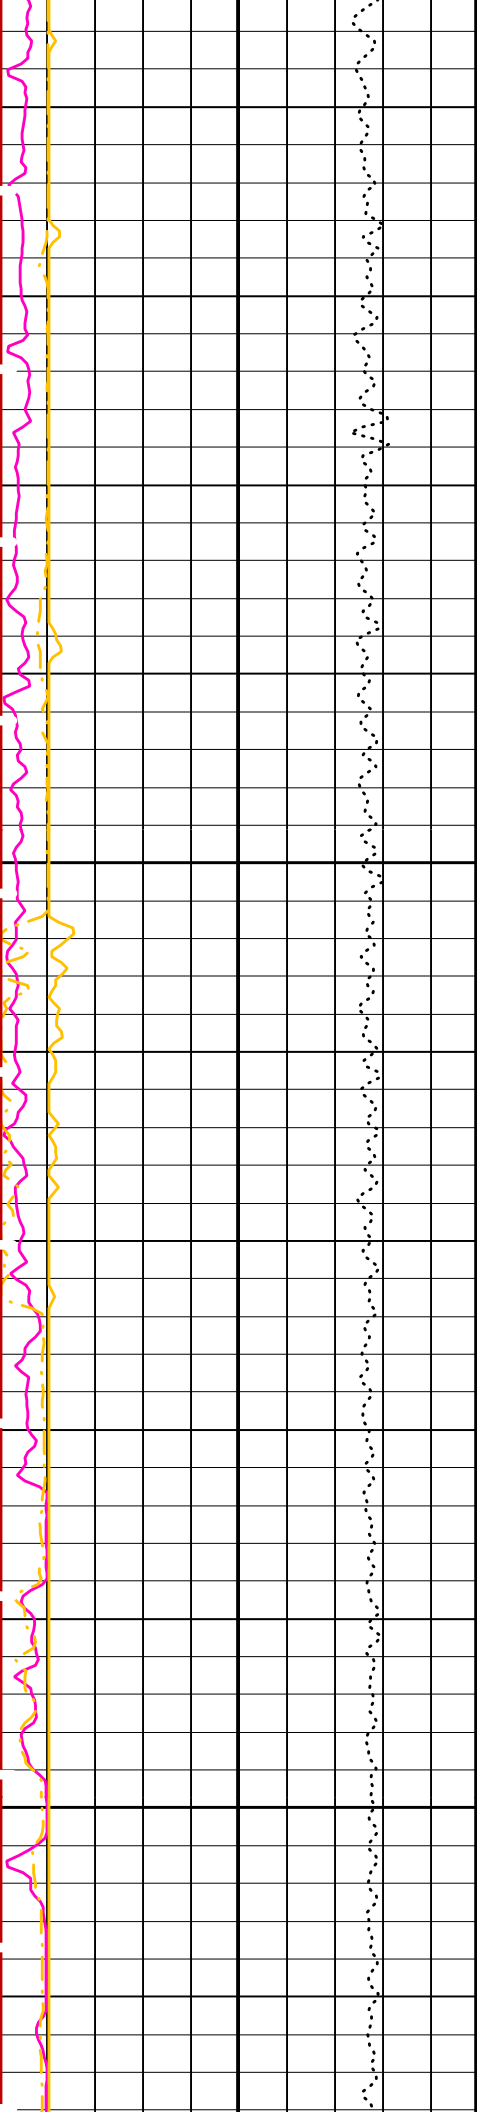

1000



1025

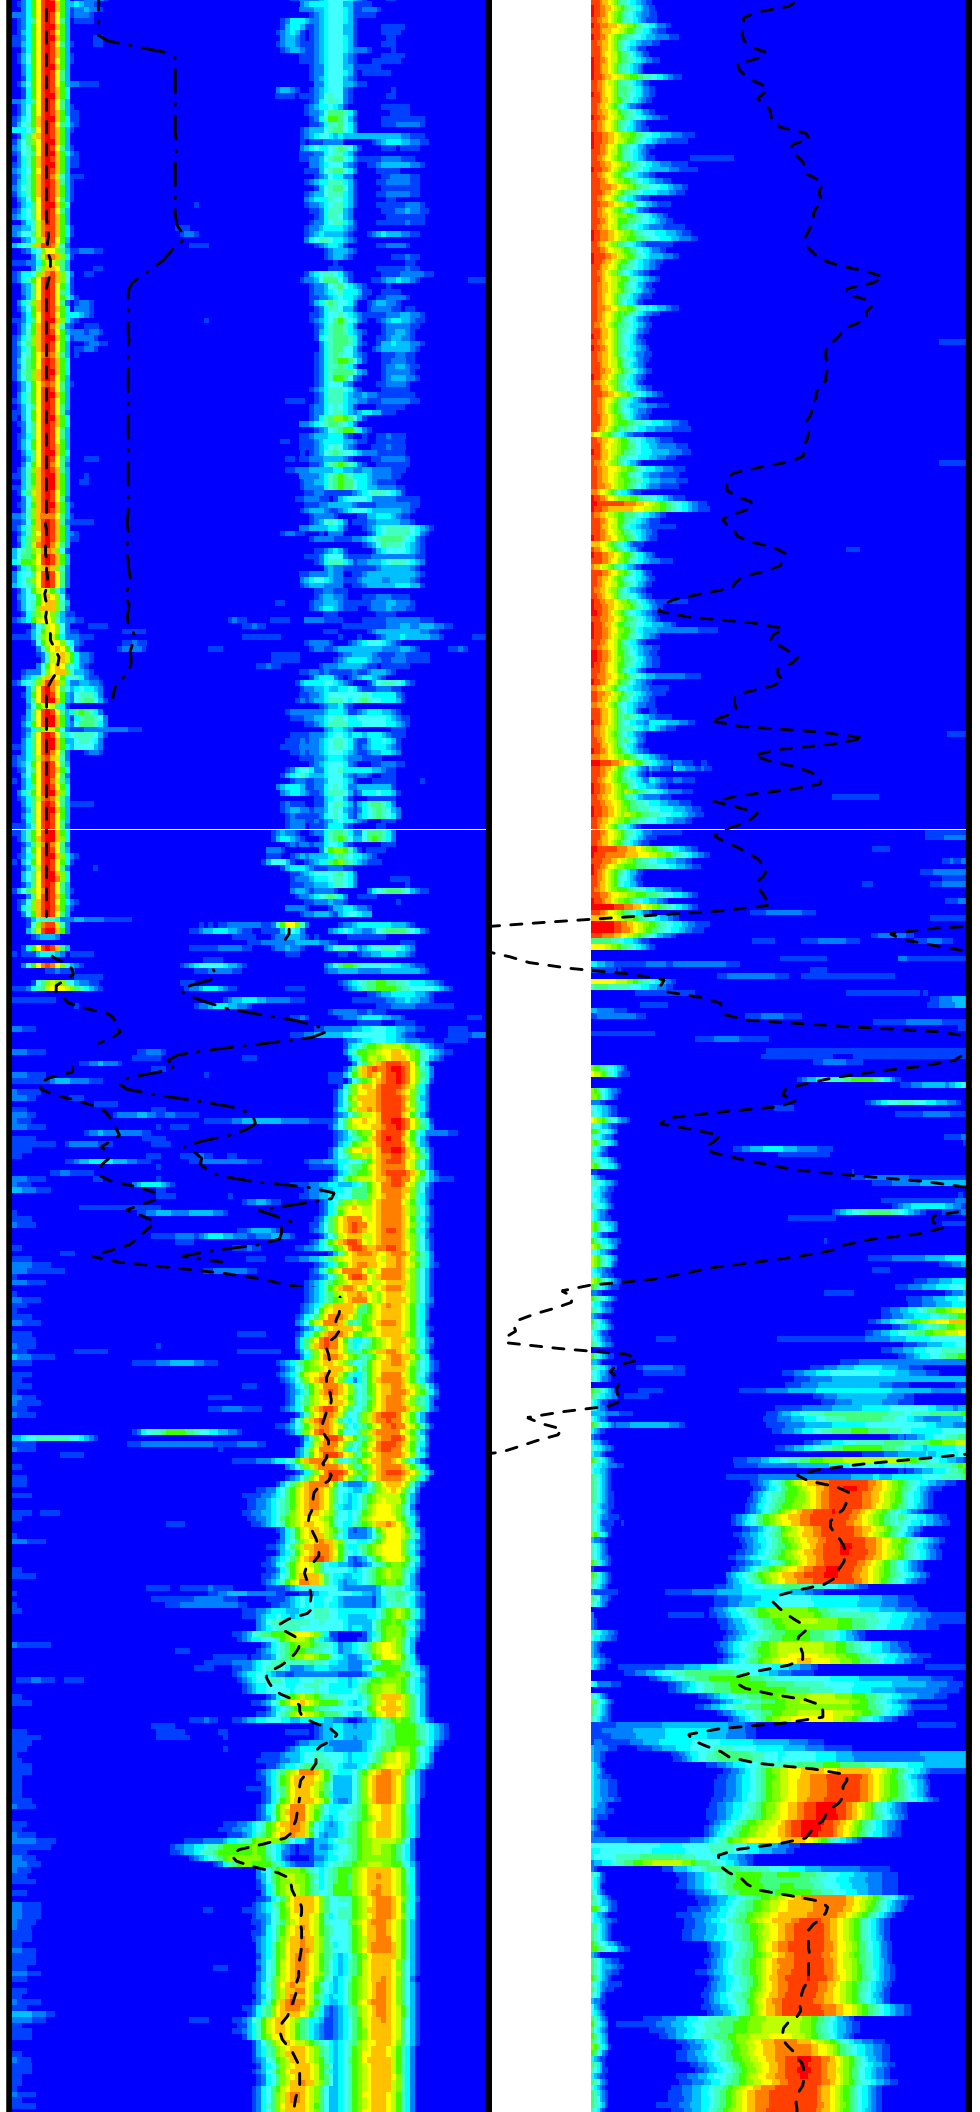


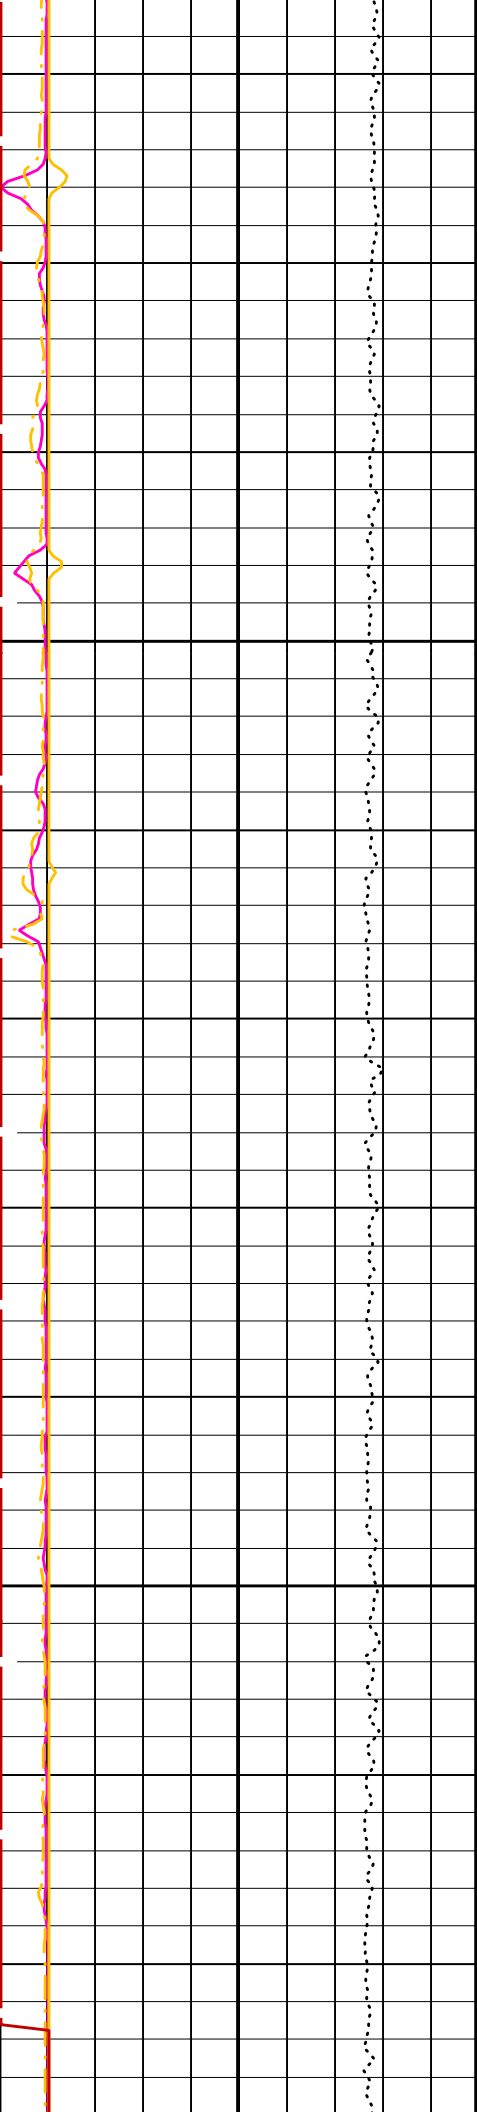



1050

1075

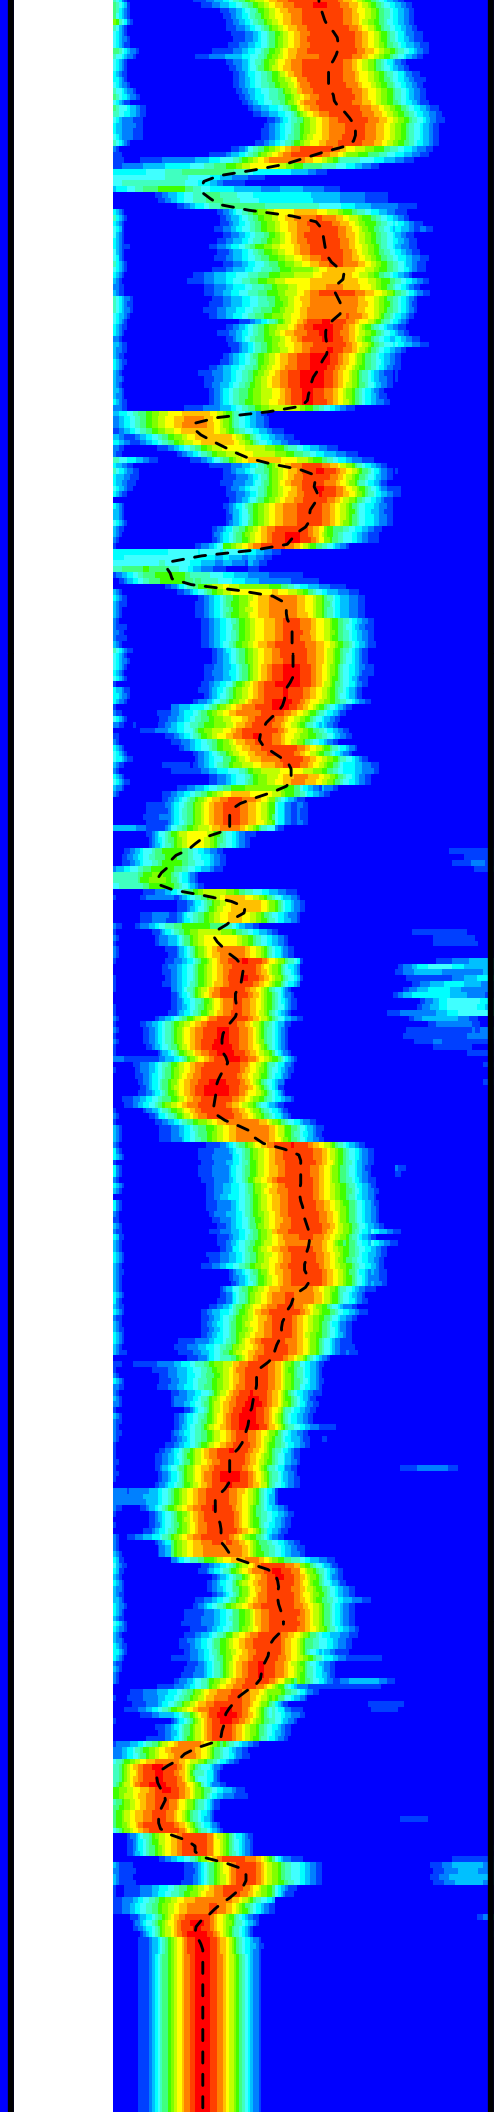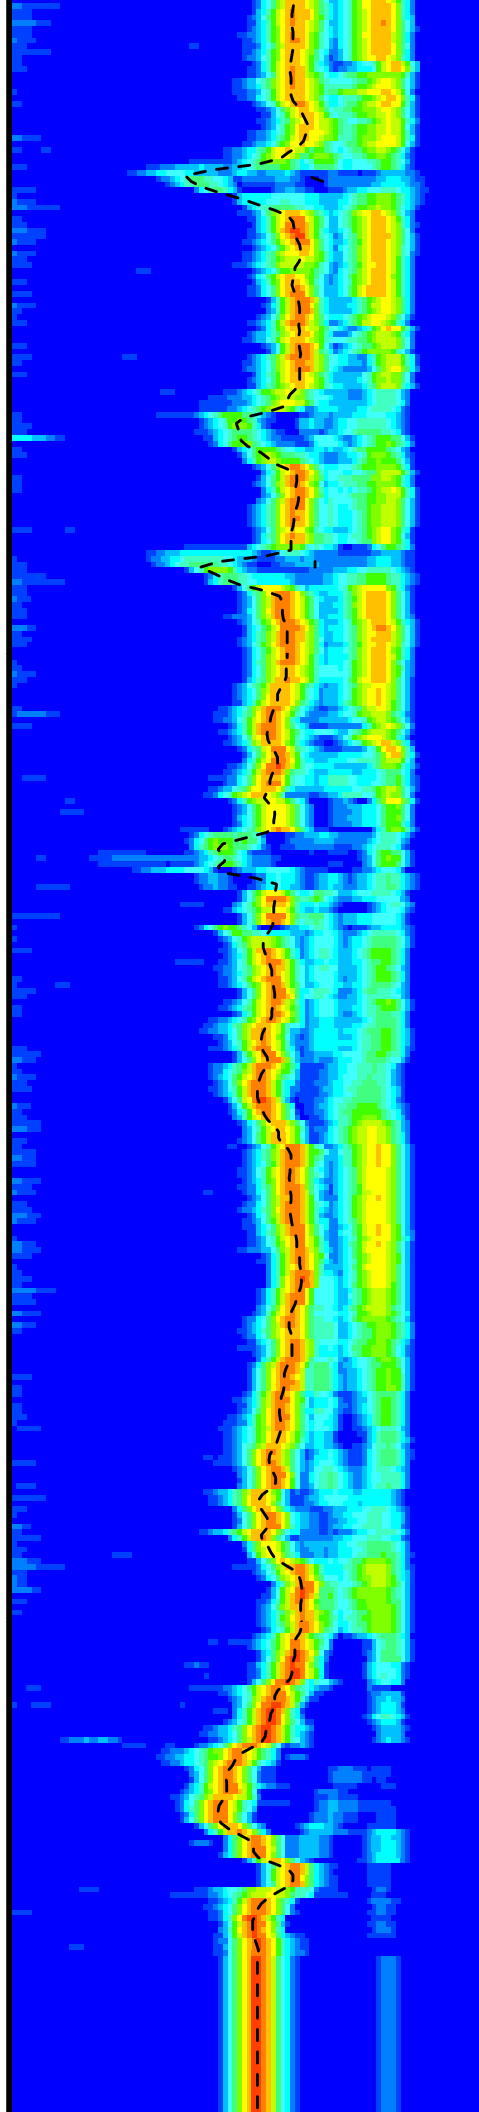

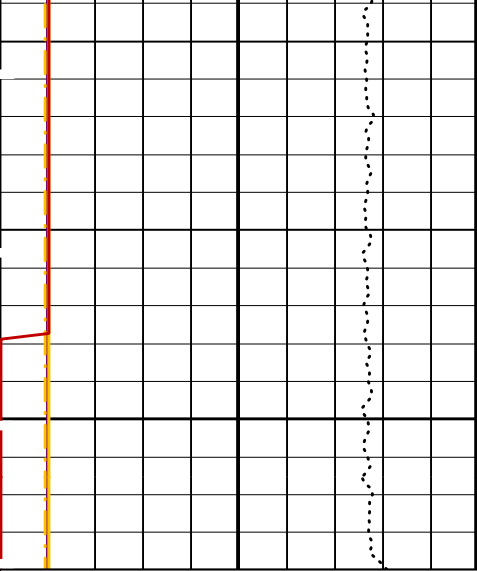

1100

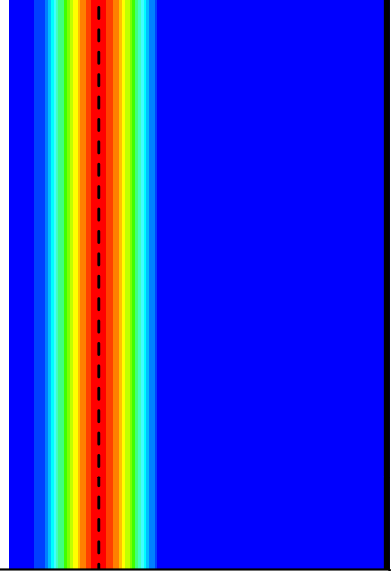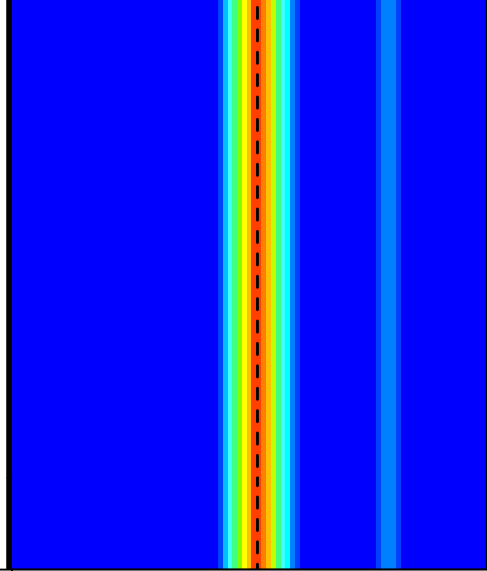

Tension (TENS) (LBF)	10000	0
Peak Coherence / RA - Upper Dipole (CHR2)	0	10
Peak Coherence / RA - P & S Comp (CHRP)	0	10
Peak Coherence / RA - P & S Shear (CHRS)	-1	9
Waveform Data Copy Indicator 4 - Monopole P&S (WCI4)	0	10

Delta-T Comp / RA - P & S (DTRP) (US/F)	40	240
Delta-T Shear / RA - P & S (DTRS) (US/F)	40	240
Min	Amplitude	Max
Rec.Array P&S Slow Proj. CVDL (SPR4)		
40	(US/F)	240

Delta-T Shear / RA - Upper Dipole (DT2R) (US/F)	75	775
Min	Amplitude	Max
Rec.Array U.Dipole Slow Proj. CVDL (SPR2)		
75	(US/F)	775

PIP SUMMARY

Time Mark Every 60 S

Parameters

DLIS Name	Description	Value
DSST-B: Dipole Shear Imager - B		
BHS	Borehole Status	OPEN
CASF	Label Casing Function - Monopole P&S	50
COLL	Label Slowness Lower Limit - Monopole P&S Compressional	40 US/F
COUL	Label Slowness Upper Limit - Monopole P&S Compressional	180 US/F
DDE2	Digitizing Delay 2	0 US
DDE4	Digitizing Delay 4	0 US
DDEX	Digitizing Delay X	0 US
DLCS	Label Compressional Source - Dipole Shear	USE
DSHL	Label Slowness Lower Limit - Dipole Shear	220 US/F
DSHU	Label Slowness Upper Limit - Dipole Shear	1600 US/F
DSI2	Digitizer Sample Interval 2	40 US
DSI4	Digitizer Sample Interval 4	10 US
DSIX	Digitizer Sample Interval X	40 US
DTCS	Compressional Delta-T Source for DTCS Channel	PS_COMP
DTF	Delta-T Fluid	189 US/F
DWC2	Digitizer Word Count 2	512
DWC4	Digitizer Word Count 4	512
DWCX	Digitizer Word Count X	512
FILG	Label Fill Gap Control - Monopole P&S	COMP_SHEAR
LFC	Label Formation Character - Monopole P&S	DYNAMIC
MCS	Mean Casing Slowness	57 US/F
MTXG	Monopole Transmitter Geometry	186 IN
NWI2	Number Waveform Items 2	8
NWI4	Number Waveform Items 4	8
NWIX	Number Waveform Items X	0
RSMN	Label Shear/Compressional Minimum Ratio - Monopole P&S	1.4

RSMX	Label Shear/Compressional Maximum Ratio - Monopole P&S	2.12	
RX1G	Receiver 1 Geometry	294	IN
RX2G	Receiver 2 Geometry	300	IN
RX3G	Receiver 3 Geometry	306	IN
RX4G	Receiver 4 Geometry	312	IN
RX5G	Receiver 5 Geometry	318	IN
RX6G	Receiver 6 Geometry	324	IN
RX7G	Receiver 7 Geometry	330	IN
RX8G	Receiver 8 Geometry	336	IN
SAM2	DSST Sonic Acquisition Mode 2 - Upper Dipole Mode	ODD	
SAM4	DSST Sonic Acquisition Mode 4 - High Frequency Monopole Mode for P&S	EVEN	
SAMX	DSST Sonic Acquisition Mode X - Both Dipoles or Monopole Mode for Expert	OFF	
SAS2	STC Sonic Array Status - Upper Dipole	255	
SAS4	STC Sonic Array Status - Monopole P&S	255	
SBO2	STC Search Band Offset - Upper Dipole	3000	US
SBO4	STC Search Band Offset - Monopole P&S	500	US
SBR4	STC Baseline Removal - Monopole P&S	ON	
SBW2	STC Search Bandwidth - Upper Dipole	8000	US
SBW4	STC Search Bandwidth - Monopole P&S	2000	US
SFC2	STC Formation Character - Upper Dipole	SELECTABLE	
SFC4	STC Formation Character - Monopole P&S	SELECTABLE	
SFM2	STC Filter - Upper Dipole	B1-3K	
SFM4	STC Filter - Monopole P&S	B3-20K	
SHLL	Label Slowness Lower Limit - Monopole P&S Shear	75	US/F
SHUL	Label Slowness Upper Limit - Monopole P&S Shear	180	US/F
SLL2	STC Slowness Lower Limit - Upper Dipole	220	US/F
SLL4	STC Slowness Lower Limit - Monopole P&S	40	US/F
SST2	STC Slowness Step - Upper Dipole	4	US/F
SST4	STC Slowness Step - Monopole P&S	2	US/F
SSW2	STC Source Waveform - Upper Dipole	WF_SAM2	
SSW4	STC Source Waveform - Monopole P&S	WF_SAM4	
STLL	Label Slowness Lower Limit - Monopole Stoneley	180	US/F
STUL	Label Slowness Upper Limit - Monopole Stoneley	780	US/F
SUL2	STC Slowness Upper Limit - Upper Dipole	1600	US/F
SUL4	STC Slowness Upper Limit - Monopole P&S	240	US/F
SWD2	STC Slowness Width - Upper Dipole	40	US/F
SWD4	STC Slowness Width - Monopole P&S	10	US/F
TBF2	STC Time for Baseline Fill - Upper Dipole	0	US
TBF4	STC Time for Baseline Fill - Monopole P&S	300	US
TLL2	STC Time Lower Limit - Upper Dipole	1420	US
TLL4	STC Time Lower Limit - Monopole P&S	150	US
TST2	STC Time Step - Upper Dipole	200	US
TST4	STC Time Step - Monopole P&S	50	US
TUL2	STC Time Upper Limit - Upper Dipole	20440	US
TUL4	STC Time Upper Limit - Monopole P&S	3660	US
TWD2	STC Time Width - Upper Dipole	2000	US
TWD4	STC Time Width - Monopole P&S	1000	US
TWI2	STC Integration Time Window - Upper Dipole	1600	US
TWI4	STC Integration Time Window - Monopole P&S	500	US
TWSX	Transmitter Waveform Select X	0	
UTXG	Upper Dipole Transmitter Geometry	162	IN
WFM4	Waveform Mode 4	W1	
BHS	SGT-N: Scintillation Gamma-Ray - N Borehole Status		OPEN

Format: DSST_P_S_UPPER_VDL_COLOR Vertical Scale: 1:200 Graphics File Created: 08-May-2005 10:57

OP System Version: 12C0-301
MCM

MEST-B	12C0-301	DTA-A	12C0-301
DSST-B	12C0-301	SGT-N	12C0-301
DTC-H	12C0-301		

Output DLIS Files

DEFAULT	FMS_DSI_008LUP	FN:10	PRODUCER	08-May-2005 10:57
REDUCED	FMS_DSI_008LUP	FN:11	PRODUCER	08-May-2005 10:57



CALIBRATIONS

Calibration and Check Summary

Measurement	Nominal	Master	Before	After	Change	Limit	Units
-------------	---------	--------	--------	-------	--------	-------	-------

Micro Electrical Scanner - B (Slim) Wellsite Calibration - Caliper Calibration

Before: 28-Apr-2005 15:20

Caliper 1 Zero Measurement	8.000	N/A	8.072	N/A	N/A	N/A	IN
Caliper 2 Zero Measurement	8.000	N/A	7.553	N/A	N/A	N/A	IN
Caliper 1 Plus Measurement	12.00	N/A	12.28	N/A	N/A	N/A	IN
Caliper 2 Plus Measurement	12.00	N/A	11.76	N/A	N/A	N/A	IN

Micro Electrical Scanner - B (Slim) Wellsite Calibration - CROUZET ACCELEROMETER PROM HAS BEEN READ CORRECTLY

Before: 8-May-2005 8:54

TEMPERATURE REFERENCE :	N/A	N/A	20	N/A	N/A	N/A	DEGC
YEAR OF CALIBRATION :	N/A	N/A	99	N/A	N/A	N/A	
MONTH OF CALIBRATION :	N/A	N/A	3	N/A	N/A	N/A	
SERIAL NUMBER :	N/A	N/A	743	N/A	N/A	N/A	

Micro Electrical Scanner - B (Slim) Wellsite Calibration - CROUZET MAGNETOMETER PROM HAS BEEN READ CORRECTLY

Before: 8-May-2005 8:54

TEMPERATURE REFERENCE :	N/A	N/A	25	N/A	N/A	N/A	DEGC
YEAR OF CALIBRATION :	N/A	N/A	91	N/A	N/A	N/A	
MONTH OF CALIBRATION :	N/A	N/A	5	N/A	N/A	N/A	
SERIAL NUMBER :	N/A	N/A	98	N/A	N/A	N/A	

Scintillation Gamma-Ray - N Wellsite Calibration - Detector Calibration

Before: 6-May-2005 21:58

Gamma Ray (Jig - Bkg)	166.0	N/A	166.0	N/A	N/A	15.09	GAPI
Gamma Ray (Calibrated)	165.0	N/A	165.0	N/A	N/A	15.00	GAPI

Micro Electrical Scanner - B (Slim) / Equipment Identification

Primary Equipment:

MEST Sonde - B	MEDS - B
MEST Preamplifier Cartridge - AB	MEPC - AB
GPIT Cartridge - A	GPIC - A
MEST Acquisition Cartridge - A	MEAC - A

Auxiliary Equipment:

MEST-B Preamplifier Cartridge Housing	MEPH - A
MEST Acquisition Cartridge Housing (Slim)	MEAH - B

Scintillation Gamma-Ray - N / Equipment Identification

Primary Equipment:

Scintillation Gamma Cartridge	SGC - TB
Scintillation Gamma Detector	SGD - TAA

Auxiliary Equipment:

Scintillation Gamma Housing	SGH - K
Gamma Source Radioactive	GSR - U/Y

Scintillation Gamma-Ray - N Wellsite Calibration

Detector Calibration

Phase	Gamma Ray Background GAPI	Value	Phase	Gamma Ray (Jig - Bkg) GAPI	Value	Phase	Gamma Ray (Calibrated) GAPI	Value
Before	█	1.507	Before	█	166.0	Before	█	165.0
	0 (Minimum) 30.00 (Nominal) 120.0 (Maximum)			150.9 (Minimum) 166.0 (Nominal) 181.1 (Maximum)			150.0 (Minimum) 165.0 (Nominal) 180.0 (Maximum)	

Before: 6-May-2005 21:58

Company: Lamont Doherty

Schlumberger

Well: Expedition 307 Site U1316C

Field: Porcupine Basin Carbonate Mounds

Rig: Joides Resolution

Country: Ireland

Dipole Shear Sonic Imager

Gamma Ray